

**UNCLASSIFIED**

**AD 406 110**

**DEFENSE DOCUMENTATION CENTER**

**FOR**

**SCIENTIFIC AND TECHNICAL INFORMATION**

**CAMERON STATION, ALEXANDRIA, VIRGINIA**



**UNCLASSIFIED**

SEL-63-022

406110

# The Foundations of Network Theory

by  
R. W. Newcomb


March 1963

406110

Technical Report No. 2250-4

Prepared under Office of Naval Research Contract  
Nonr 225(24), NR 373 360

Jointly supported by the U.S. Army Signal Corps, the  
U.S. Air Force, and the U.S. Navy (Office of Naval Research)



**SYSTEMS THEORY LABORATORY**

**STANFORD ELECTRONICS LABORATORIES**

**NO OTS** STANFORD UNIVERSITY • STANFORD, CALIFORNIA



NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

### **ASTIA AVAILABILITY NOTICE**

**Qualified requesters may obtain copies of this report from ASTIA. Foreign announcement and dissemination of this report by ASTIA is limited.**

THE FOUNDATIONS OF NETWORK THEORY

by

R. W. Newcomb

March 1963

Reproduction in whole or in part  
is permitted for any purpose of  
the United States Government.

Technical Report No. 2250-4

Prepared under

Office of Naval Research Contract

Nonr-225(24), NR 373 360

Jointly supported by the U.S. Army Signal Corps, the  
U.S. Air Force, and the U.S. Navy  
(Office of Naval Research)

Systems Theory Laboratory  
Stanford Electronics Laboratories  
Stanford University      Stanford, California

### ABSTRACT

In these few pages, reader you will find  
Complete a theory, from McMillan does it stem,  
To satisfy the criticizing mind.

The topic network's pure foundation treats.  
With definitions it begins, such is system;  
Then n-port properties one here soon meets.

For general networks are such defined;  
Then comes the distributional extension  
For special type n-ports this holds refined.

The end has exponential variables to greet,  
With generalized descriptions linear, the mention,  
And paradoxes as an unsolved feat.

## CONTENTS

	Page
I. INTRODUCTION . . . . .	1
II. SYSTEMS, NETWORKS & n-PORTS . . . . .	2
III. PROPERTIES OF n-PORTS . . . . .	8
IV. EXTENSIONS . . . . .	16
V. CONCLUSIONS . . . . .	30

## ILLUSTRATIONS

Figure	Page
1. Possible variable choices . . . . .	2
2. n-port variables . . . . .	4
3. Representations for example 1 . . . . .	5
4. Nullator and norator . . . . .	6
5. Conversion of 4 terminal network to a 3-port . . . . .	7
6. Nonlinear N . . . . .	9
7. The ideal diode . . . . .	9
8. Voltages used in definition 2 . . . . .	10
9. Augmented network . . . . .	12
10. Limiting networks . . . . .	16
11. Functions converging to $u(-t)$ . . . . .	19
12. Network for example 3 . . . . .	22
13. Network for example 4a) . . . . .	24
14. A closed circuit . . . . .	28
15. Illustration of equivalent circuits . . . . .	29

## I. INTRODUCTION

Recently much interest has centered on obtaining a rigorous theory of networks and their properties. Such interest seems to have been originated by McMillan and Raisbeck<sup>1\*</sup> and has culminated in several detailed theories.<sup>2</sup> Of especial note are the results of Youla, Castriota and Carlin and the extensions of Zemanian. However, although these are quite rigorous, they are, we feel quite complicated for what is required. Further these treatments are strictly limited to linear, time-invariant, passive networks and even in this case are open to several interpretations which can lead to contradictory results.<sup>3</sup>

Here we present a basic theory of what we believe to be the most general types of conceivable networks. For this we abandon the operator concept, which we feel is more appropriate to control system studies, and revert to the concept of allowed pairs, whose origin can be traced to McMillan. The program is to define a system, a network, and an n-port in terms of infinitely differentiable functions of support bounded on the left. The major properties of such n-ports are then defined, such as linearity, time-invariance, passivity and solvability. Such physical networks are then extended to idealized networks and more generalized variables through the use of the theory of distributions. Once this is done, general descriptions of a large class of linear, time-invariant networks can be given by using exponential variables. At this point the (bilateral) Laplace transform approach can be used in the standard manner.

The reader is assumed to have a working knowledge of elementary matrix theory, as well as a small knowledge of the theory of distributions. The latter however, isn't used until Section IV, and it is available in a companion report.<sup>4</sup> Points which are of interest, but supplementary to the main portion of the theory are expanded upon in the appended notes.

-----

\* The superscript numerals refer to the notes at the end of the report.



## II. SYSTEMS, NETWORKS & n-PORTS

We begin with the notions of systems and networks. Consider a collection of physical elements which are connected together to form some device. At this stage the entities are not restricted, they may be electrical, mechanical, thermodynamical, etc. For the present it is sufficient to look at the device at the access points, called terminals, and thus essentially ignore the internal construction. In general the device will have  $k$  such terminals which can be consecutively labeled  $\mathcal{T}_j$ ,  $j = 1, \dots, k$ , where  $k$  may in fact be infinite. In order to obtain a mathematical model, we associate with the device two column vector variables,  $\underline{f}(t)$  and  $\underline{g}(t)$ , of  $k$  entries, with the  $j^{\text{th}}$  entry being associated with  $\mathcal{T}_j$ .  $\underline{f}$  and  $\underline{g}$  are called conjugate variables and are taken such that  $\tilde{\underline{f}} \underline{g}$  is the total instantaneous power entering the device, here the superscript tilde denotes matrix transposition.<sup>5</sup> Several ways are available for choosing the variables. In the electrical case, choosing  $\underline{f}$  as voltage and  $\underline{g}$  as current, two possibilities are shown in Fig. 1.

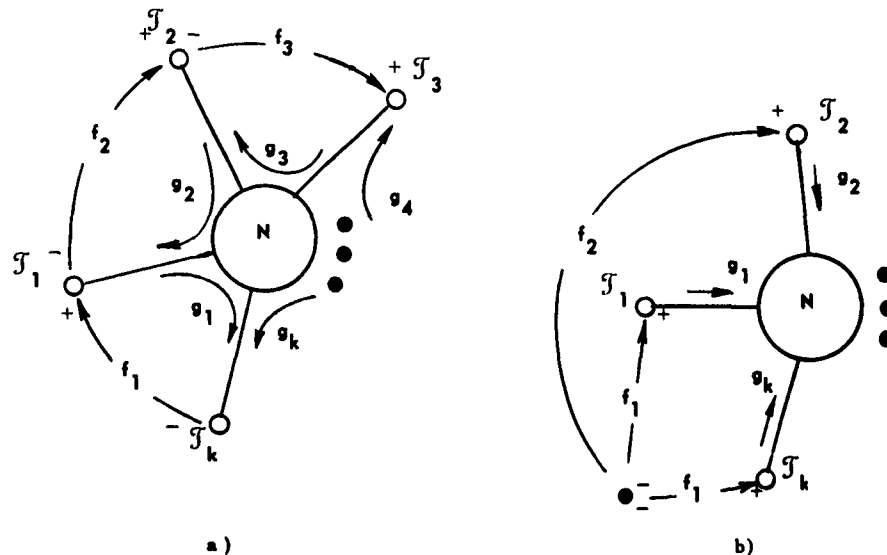


FIG. 1. POSSIBLE VARIABLE CHOICES.

We will let  $\mathcal{D}_{+k}$  denote the set of real-valued,  $k$ -vector, infinitely continuously differentiable functions of the real time variable,  $t$ ,  $-\infty \leq t \leq \infty$ , with support bounded on the left.<sup>6</sup> Further, let  $\mathcal{D}_{Nk}$  be the same as  $\mathcal{D}_{+k}$ , except that the support is bounded on the left by a fixed constant  $t_N$ ,  $t_N$  may be infinite. For a given device we will then postulate that  $t_N$  exists and that<sup>7</sup>  $f \in \mathcal{D}_{+k} \cap \mathcal{D}_{Nk}$ ,  $g \in \mathcal{D}_{+k} \cap \mathcal{D}_{Nk}$ ;  $t_N$  is to be interpreted as the creation time of the device. This restriction on the variable is a physical one,<sup>8</sup> since such quantities appear to be of the type actually measured. However, by a limiting process we will later extend the domain of definition.

Now given a specific device, some constraint,  $C$ , is placed upon the  $f$  and the  $g$ . We will incorporate in  $C$  the fact that  $f$  and  $g$  must be conjugate. For simplicity we will then denote these constraint requirements by  $fCg$ , which can be interpreted as follows. Given an  $f$ , which, by virtue of the constraints, is allowed at the terminals, there is an accompanying set of allowed  $g$ 's. Thus we can speak of allowed pairs of variables  $f, g$ . The set of all allowed pairs then serves to completely describe the device, which we define as a  $k$ -access system,  $\mathcal{S}$ . In more precise language, given  $t_N$ , a system is defined by<sup>7</sup>

$$\mathcal{S} = \{[f, g] \mid f, g \in \mathcal{D}_{+k} \cap \mathcal{D}_{Nk}, fCg\} \quad (1)$$

Note that although a system may be created at  $t_N = -\infty$ , it can't be excited until some finite time, in this formulation. If the variables are electrical, we call the system a network. For networks we will assume  $f$  to be a voltage vector.<sup>9</sup> The remaining treatment will be limited to networks.

As an example consider a resistor  $\mathcal{S}_r$ , of resistance  $r$ , which was created with the universe,  $t_N = -\infty$ .<sup>10</sup> We can then apply any current,  $g \in \mathcal{D}_{+1}$ , across the terminals. The voltage is then  $f = rg$  and

$$\mathcal{S}_r = \{[f, g] \mid f \in \mathcal{D}_{+1}, f = rg\}$$

The allowed pairs for the resistor are of the form  $[rg, g]$  for any  $g \in \mathcal{D}_{+1}$ .

in many cases the description given above yields too much information and it is advantageous to delete the extraneous data. For many applications the terminals of a network are associated in  $n$  disjoint pairs with excitations being applied only between the two terminals of a pair. If such is the case, we take  $k$  even, and it is convenient to relabel the terminals, calling those for the  $j^{\text{th}}$  pair  $T_j$  and  $T'_j$ ,  $j = 1, \dots, n = k/2$ . In this situation, if the current entering  $T_j$  is equal to the current leaving  $T'_j$ , this pair is called a port. If all terminals occur as ports, the network is called an n-port,  $N$ . For an n-port, only the  $n$ -vectors  $\underline{v}(t)$  and  $\underline{i}(t)$  of port voltages and currents are of interest. The variables for an n-port will be taken as shown in Fig. 2a) with Fig. 2b) being a convenient representation.

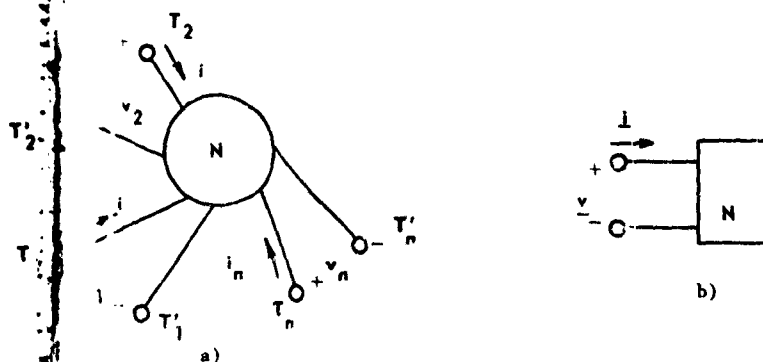


FIG. 2. n-PORT VARIABLES.

The network of Fig. 1a), for example, becomes an n-port if  $k = 2n$  and we choose  $v_j = f_{2j-1}$ ,  $i_j = g_{2j-1}$ ,  $g_{2j} = 0$ , for  $j = 1, \dots, n$ . Carrying over the previous language we characterize an n-port by

$$N = \{(\underline{v}, \underline{i}) | \underline{v}, \underline{i} \in \mathcal{D}_{+n} \cap \mathcal{D}_{Nn}, \underline{v} \underline{C} \underline{i}\} \quad (2)$$

The following examples serve to define the symbolism for some important and interesting 1-port and 2-port  $N$ .

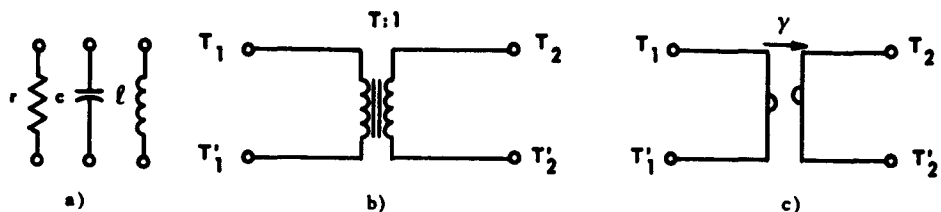


FIG. 3. REPRESENTATIONS FOR EXAMPLE 1.

Example 1:

- a) The linear, time-invariant, resistor, capacitor, and inductor are illustrated in Fig. 3a). The resistor has allowed pairs  $[ri, i]$  for any  $i \in \mathcal{D}_{+1}$ . The capacitor is described by  $[v, d(cv)/dt]$  for any  $v \in \mathcal{D}_{+1}$ . An equally valid description, if  $c \neq 0$  is  $[\frac{1}{c} \int_{-\infty}^t i(x)dx, i]$  for any  $i \in \mathcal{D}_{+1}$ . Dually the inductor has  $[d(li)/dt, i]$  for any  $i \in \mathcal{D}_{+1}$ . Here  $r, l, c$  are all real numbers.
- b) The describing equations of the ideal transformer of Fig. 3b) are

$$\begin{aligned} v_1 &= Tv_2 \\ i_2 &= -Ti_1 \end{aligned}$$

with the turns ratio  $T$  real. With  $v_2, i_1 \in \mathcal{D}_{+1}$ , but otherwise arbitrary, the allowable pairs are  $[v_2 \begin{bmatrix} T \\ 1 \end{bmatrix}, i_1 \begin{bmatrix} 1 \\ -T \end{bmatrix}]$ . Note that  $\underline{v}$  and  $\underline{i}$  are not related and that not all  $\underline{v}$  are allowed; only those with  $v_1 = Tv_2$  are acceptable. For each allowed  $\underline{v}$  there are an infinite number of allowed  $\underline{i}$ . Since  $\tilde{v}_1 = 0$ , the total power input is zero, and, when  $T = 0$ , port one is a short-circuit while port two is an open-circuit.

- c) The ideal gyrator of Fig. 3c) is described by

$$\begin{aligned} v_1 &= \gamma i_2 \\ v_2 &= -\gamma i_1 \end{aligned}$$

with the gyration resistance,  $\gamma$ , being real.<sup>12</sup>

$[\gamma \begin{bmatrix} 1 & 2 \\ -1 & 1 \end{bmatrix}, \begin{bmatrix} 1 & 1 \\ i & 2 \end{bmatrix}]$ , for any  $i \in \mathbb{D}_{+2}$ , are the allowed pairs. As with the transformer, the total power input is identically zero. If  $\gamma = 0$ , both ports are shorts, while, if we allow  $\gamma = \infty$ , both ports are opens.

The networks of Example 1 are all idealizations of actual physical elements. The inclusion of the ideal transformer is a convenience which allows a comparatively simple mathematical treatment. However, their use in physical structures is to be avoided since realizations require closely coupled coils with extremely large self and mutual inductances. Ideal gyrators have been practically realized only for microwave networks;<sup>13</sup> their inclusion is for completeness.

In contrast to the networks of Example 1 there is a whole class of degenerate networks which must be considered, in spite of the fact that they seem to bear no relationship to actual physical devices. Typical of these are the nullator, for which the only allowed pair is  $[0, 0]$ , and the norator, which is described by  $[v, i]$  with  $v$  arbitrary and  $i$  arbitrary but independent of  $v$ .<sup>14</sup> These are, respectively, represented by the symbols of Fig. 4a) and b) where realizations in terms of the elements of Example 1 are also given. Such degenerate networks are often valuable for illustrating ideas, checking results, and investigating the generality of a concept.

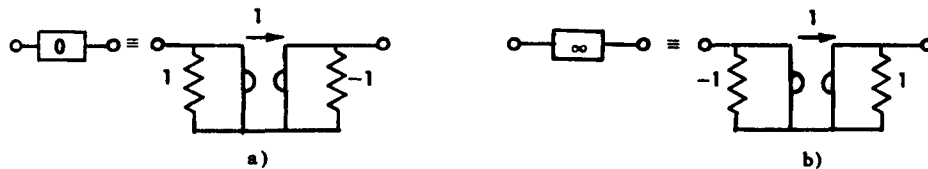


FIG. 4. NULLATOR AND NORATOR.

In general we will limit the treatment to  $n$ -ports, in contrast to  $k$ -terminal networks. Although this appears to put a restriction on the generality of the theory, such is not the case, since we are allowing the use of transformers. Thus, Cauer has shown how any  $k$ -terminal network can be made equivalent to a  $(k-1)$ -port.<sup>15</sup> The procedure is illustrated for  $k = 4$  in Fig. 5 from which the extension

to arbitrary  $k$  should be clear.

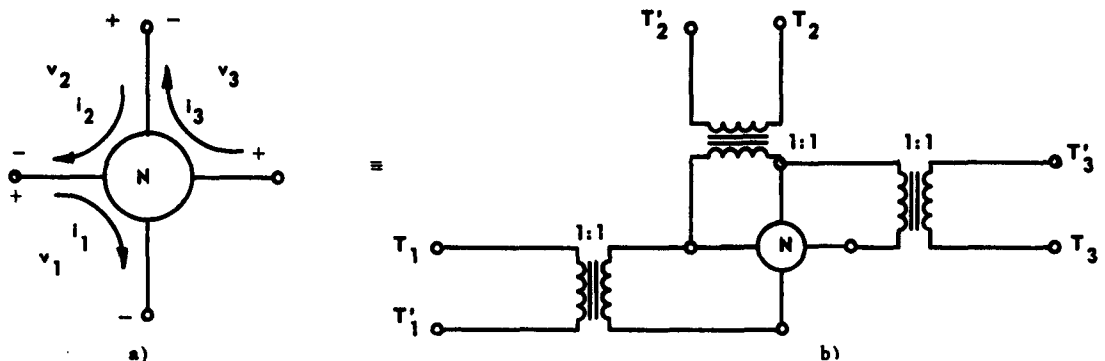


FIG. 5. CONVERSION OF 4 TERMINAL NETWORK TO A 3-PORT.

If, in Fig. 5, the variables are chosen as indicated, the network in a) is described by the same relationships as the 3-port in b).<sup>16</sup> The process is somewhat familiar from transistor theory where the transformers are omitted when treating the three-terminal transistor as a 2-port.

### III. PROPERTIES OF n-PORTS

The description of  $N$  by the use of the allowable pairs is extremely general. Using this generality, we can define some specific properties in such a manner as to be applicable in the widest possible context. After this is accomplished we can extend the notion of an  $n$ -port and obtain more tractable descriptions for several important classes of  $n$ -ports.

We begin with the concept of linearity which is conveniently phrased in the  $[\underline{v}, \underline{i}]$  language.<sup>17</sup>

Definition 1:

$N$  is linear, if for every  $[\underline{v}_1, \underline{i}_1], [\underline{v}_2, \underline{i}_2] \in N$  and all real constants,  $a$ ,

$$(H) \quad [a\underline{v}_1, a\underline{i}_1] \in N \quad (\text{homogeneity})$$

$$(A) \quad [\underline{v}_1 + \underline{v}_2, \underline{i}_1 + \underline{i}_2] \in N \quad (\text{additivity})^{18}$$

Physically the definition means that at the ports superposition holds. If  $N$  is not linear it will be called nonlinear. Apparently every physical  $N$  is actually nonlinear. At best any existing  $N$  will satisfy definition 1 for only some pairs and some  $a$ . Linearity is then an idealization which is strictly only valid in practice over some range of the variables. In spite of this, most of the theory will be limited to linear  $N$ . This is justified by the fact that a first approximation to a nonlinear  $N$  is a linear  $N$ . Further, very general results are available for linear  $N$ , while results for only specific nonlinear networks can be found.

The  $N$  of Example 1 are all linear while the network described by  $[+\sqrt{i^2}, i]$  is not a linear  $N$ , if  $i$  is arbitrary. For control systems an important nonlinear network is the 1-port defined by the curve of Fig. 6a) and called the saturator. Another nonlinear  $N$  is the network of Fig. 6b) for which

$$[0, E/r] + [v, (v+E)/r] = [v, (v+2E)/r] \neq [v, (v+E)/r]$$

with  $E$  a fixed function in  $\mathcal{D}_{+1}$ . Here the fourth and the first two pairs are allowable while the third one is not.

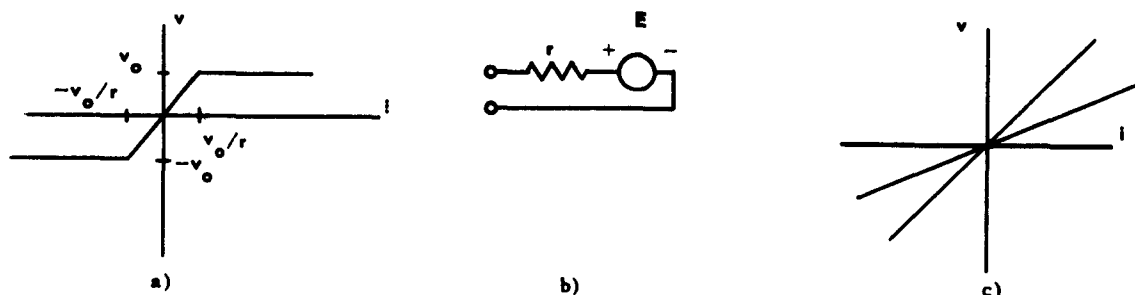


FIG. 6. NONLINEAR N.

Some interesting 1-ports show that homogeneity and additivity can be separately violated. Thus the  $N$  for which  $v$  and  $i$  take on only integer values for  $t > t_0$ , but for which  $v$  and  $i$  are in  $\mathcal{D}_{+1}$  for all  $t$ , satisfies the additivity requirement but not the homogeneity one. The double-valued 1-port described by the curves of Fig. 6c) possesses homogeneity but not additivity.<sup>19</sup>

The ideal diode of Fig. 7a) is another useful nonlinear  $N$ . Using it in the linear network of Fig. 7b) shows that a network constructed from nonlinear elements need not be nonlinear.<sup>20</sup>

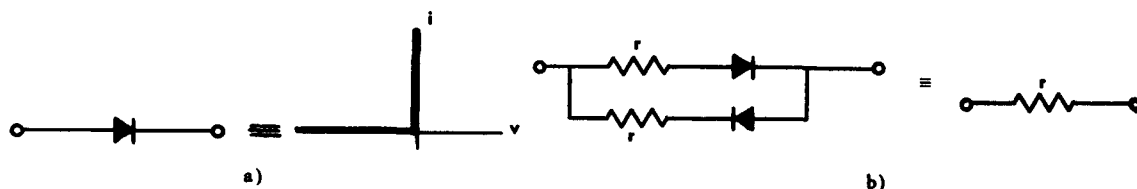


FIG. 7. THE IDEAL DIODE.

In passing, it is worth point out that the set of allowed pairs for a linear  $N$  forms a vector space over the field of real numbers, if we define<sup>21</sup>



$$a[\underline{v}, \underline{i}] = [a\underline{v}, a\underline{i}]$$

$$[\underline{v}_1, \underline{i}_1] + [\underline{v}_2, \underline{i}_2] = [\underline{v}_1 + \underline{v}_2, \underline{i}_1 + \underline{i}_2]$$

The second concept of interest is that of time-invariance. Physically we would like this to mean that no elements inside  $N$  have parameters which change in time. In terms of the terminal behavior this is best phrased in the following manner.<sup>22</sup>

Definition 2:

$N$  is time-invariant, if for every  $[\underline{v}, \underline{i}] \in N$  there is a  $[\underline{v}_0, \underline{i}_0] \in N$  such that, for every real, finite, constant  $\tau \geq 0$ ,

$$[\underline{v}(t), \underline{i}(t)] = [\underline{v}_0(t+\tau), \underline{i}_0(t+\tau)] \quad (3)$$

In this we are obliged to take  $\tau \geq 0$  since, in general,  $\underline{v}, \underline{i} \in \mathcal{D}_{Nn}$ . Pictorially  $v$  and  $v_0$  are related as shown in Fig. 8.

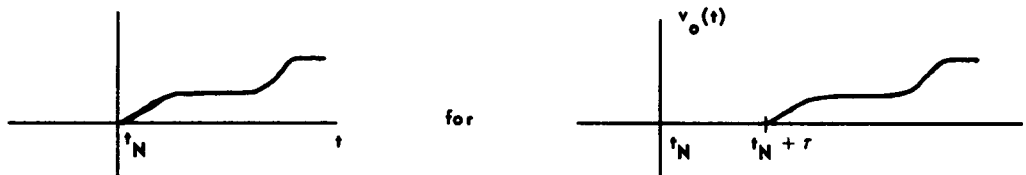


FIG. 8. VOLTAGES USED IN DEFINITION 2.

If  $N$  is not time-invariant, it is only logical to call it time-varying or time-variable. The networks of Example 1 are all time-invariant, if the parameters are independent of time. Thus for the capacitor any  $[v(t), d\{cv(t)\}/dt]$  has  $[v(t-\tau), d\{cv(t-\tau)\}/dt]$  allowed for any  $v \in \mathcal{D}_{+1}$  and any  $\tau \geq 0$ , when  $c$  is a constant. However, if  $c = t$  then

$$[v(t), d\{tv(t)\}/dt] = [v_0(t+\tau), i_0(t+\tau)]$$

implies by a simple change of variable

$$v_0(t) = v(t-\tau)$$

$$i_0(t) = d\{(t-\tau)v(t-\tau)\}/dt$$

But for  $\tau > 0$  this  $i_0$  is not allowed since such a  $v_0$  requires a current of the form

$$d\{tv_0(t)\}/dt = d\{tv(t-\tau)\}/d\tau$$

Thus if  $c = t$  the capacitor is time-varying, which lends some credibility to the definition.

As with linearity, time-invariance is an idealization which apparently can never occur in nature. This statement is justified by the fact that most networks must be built. Although it is possible to conceive of networks existing since  $t = -\infty$ , as Shelley's universe,<sup>10</sup> the most interesting devices are presently being conceived. However, a study of time-variable networks appears to be in its infancy. If  $N$  is time-invariant, it can be extended from  $\mathcal{D}_{+n} \cap \mathcal{D}_{Nn}$  to  $\mathcal{D}_{+n}$  by assuming 3) to hold for finite  $\tau > 0$ .

Another concept of importance is that of passivity. This notion is somehow tied to the presence of internal sources, however, the negative resistor shows that conceptually, at least, the source idea isn't quite what is desired. Passivity is best defined in terms of energy.<sup>23</sup>

Definition 3:

$N$  is passive if for every  $[v, i] \in N$  and every finite  $t$

$$\mathcal{E}(t) = \int_{-\infty}^t \tilde{v}(\tau) \underline{i}(\tau) d\tau \geq 0 \quad (4)$$

If  $N$  is not passive it will be called active. In contrast to linearity and time-invariance, passivity can actually occur in nature. The transformer and the gyrator, as well as the nullator, are passive networks for which  $\mathcal{E}(t) = 0$ .<sup>24</sup> If the describing parameters of the resistor, capacitor, and inductor are positive constants, these are passive  $N$ . For instance the capacitor has, recalling that  $v(-\infty) = 0$ ,

$$\mathcal{E}(t) = \int_{-\infty}^t cv(\tau) \frac{dv(\tau)}{d\tau} d\tau = cv^2(t)/2$$

Note that if  $c < 0$ , the capacitor is an active network. The passivity of a given device will sometimes depend upon the point of view taken when defining the mathematical model. For instance, if only the small signal behavior of a transistor is considered, the transistor is active. However, if the bias sources are considered as being

externally connected the transistor is passive.

Another property which has been greatly ignored, but whose importance has been pointed out by Youla, is that of solvability.<sup>25</sup>

Definition 4:

$N$  is solvable if for every  $\underline{e} \in \mathcal{D}_{+n} \cap \mathcal{D}_{Nn}$  the equation

$$\underline{e} = \underline{v} + \underline{i}$$

is satisfied by a unique  $[\underline{v}, \underline{i}] \in N$

Here we can consider a new  $n$ -port, called the augmented network,  $N_a$ , assumed created at  $t_N$ , as shown in Fig. 9, with  $[\underline{e}, \underline{i}] \in N_a$ .

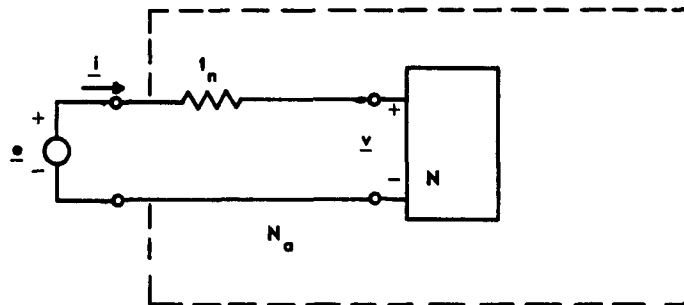


FIG. 9. AUGMENTED NETWORK.

Solvability doesn't seem to be an idealization,<sup>26</sup> assuming it, a matrix description will be guaranteed in the linear, time-invariant case. The open, the short, and the passive networks of Example 1 are all solvable while the nullator, norator and negative unit resistor are not solvable.

If  $N$  has any of the properties of linearity, time-invariance or passivity then  $N_a$  has the same properties.<sup>27</sup> This is not the case for solvability as is seen by the original  $N$  being a minus two ohm resistor. However, if  $N$  is passive and solvable then  $N_a$  seems to also be solvable.

Although the notions of linearity, time-invariance, passivity and solvability are the most fundamental concepts with which we will work, there are several others of interest. Among these is that of

reciprocity which stems directly from Maxwell's equations.<sup>28</sup>

Physically a reciprocal network should have the voltage response due to a current excitation independent of an interchange of response and excitation points. Mathematically this is formulated in the following manner,<sup>29</sup> where the normal level asterisk denotes convolution, in this case of two vectors.

Definition 5:

$N$  is reciprocal if for every  $[v_1, i_1], [v_2, i_2] \in N$  we have

$$\tilde{v}_1 * i_2 = \tilde{v}_2 * i_1 \quad (6)$$

The difference between the power input to a network and the forms in (6) should be observed. In the latter, variables for the first measurement are convoluted by their conjugates for the second measurement. In contradistinction to the use of the words time-varying, customary usage requires that the class of nonreciprocal networks contains the class of reciprocal networks. It also appears that reciprocity is an idealization.

A transformer is a reciprocal 2-port, since

$$[Tv_{2_1}, v_{2_1}] * \begin{bmatrix} i_{1_2} \\ -Ti_{1_2} \end{bmatrix} = 0 = [Tv_{2_2}, v_{2_2}] * \begin{bmatrix} i_{1_1} \\ -Ti_{1_1} \end{bmatrix}$$

In contrast, the gyrator is a linear, passive 2-port which is not reciprocal, if  $\gamma \neq 0$ , since

$$[\gamma i_{2_1}, -\gamma i_{1_1}] * \begin{bmatrix} i_{1_2} \\ i_{2_2} \end{bmatrix} = \gamma (i_{1_2} i_{2_1} - i_{1_1} i_{2_2}) = -[\gamma i_{2_2}, -\gamma i_{1_2}] * \begin{bmatrix} i_{1_1} \\ i_{2_1} \end{bmatrix}$$

There are many linear 2-ports which are not reciprocal, but only one such 1-port, the norator. The ideal diode of Fig. 7 is a 1-port which is nonlinear, time-invariant, passive, solvable, but not reciprocal.

The notion of causality is of philosophical interest. Physically this means that the application of some variables at time  $t_0$  causes other variables to appear at time  $t_1 \geq t_0$ . We believe that by any mathematical theory it is impossible to tell what is a cause and what is an effect. Thus, we limit our ideas to the concept of antecedance

which is sometimes confused with causality.<sup>30</sup>

Definition 6:

$N$  is antecedal if for every  $t_0 > t_N$  there are  $[0, \underline{i}(t)]$ ,  $[\underline{v}(t), 0] \in N$  for  $-\infty < t < t_0$ , and for every such pair

- a)  $[0, \underline{i}(t)] \in N$  implies  $\underline{i}(t) = 0$  for  $-\infty < t < t_0$
- b)  $[\underline{v}(t), 0] \in N$  implies  $\underline{v}(t) = 0$  for  $-\infty < t < t_0$

The resistor, inductor, capacitor and nullator are all antecedal, while the transformer, norator, opens and shorts are not. A concept somewhat related to that of antecedance is that of single-valuedness.

Definition 7:

$N$  is single-valued if every  $[\underline{v}, \underline{i}] \in N$  has  $\underline{i}$  uniquely determined by  $\underline{v}$  and  $\underline{v}$  uniquely determined by  $\underline{i}$ .

Typical single-valued networks are the resistor, inductor, nullator and gyrator. The saturator, transformer and norator are not single-valued. Clearly every antecedal  $N$  is single-valued but the converse need not be true, as is seen by Fig. 6b). As we shall see, the restriction of variables to  $\mathcal{D}_+$  rules out the non-antecedal and non-single-valuedness of some networks.

Almost every synthesis method is based upon the synthesis of lossless networks and hence the next definition is of some importance.<sup>31</sup>

Definition 8:

$N$  is lossless if

- S)  $N$  is solvable and
- P)  $N$  is passive and
- L) for every  $\underline{e} \in \mathcal{D}_{+n} \cap \mathcal{D}_{Nn} \cap L_{2n}$

$$\mathcal{E}(\infty) = \int_{-\infty}^{\infty} \underline{\tilde{v}}(\tau) \underline{i}(\tau) d\tau = 0 \quad (7)$$

Here  $\underline{e}$  is  $\underline{v} + \underline{i}$  as in (5). Relaxing the  $L_{2n}$  requirement causes trouble, since variables which don't vanish at infinity can give a finite, non-zero  $\mathcal{E}(\infty)$ . The passivity requirement is a convenience which will be used to assure that  $\underline{v}$  and  $\underline{i}$  will lie in  $L_{2n}$  if  $\underline{e}$  does. Relaxing the passive requirement allows the active capacitor with  $c = v$  as a lossless

network; however, the capacitor  $c = v^2$  would still not be allowed since  $\int_{-\infty}^{\infty} 3v^3 dv$  need not exist for  $eeL_{21}$ . The linear, passive inductor and

capacitor, as well as the gyrator and transformer, are lossless, while the nullator and resistor are not. A network constructed only of lossless elements need not be lossless, as is seen by observing the inductor-capacitor equivalent circuit of an infinitely long transmission-line, which has a purely resistive input impedance.

#### IV. EXTENSIONS

Using the theory developed so far there are idealized situations which can't be considered. For instance we can't as yet excite with unit step functions or impulses, or handle initial conditions in the customary way, and a perfect DC battery doesn't qualify as a network. We therefore now relax some of the physical constraints and cover these and similar cases by taking suitable limits.

We will let  $\mathcal{D}'_n$  denote the real-valued  $n$ -vector distributions and  $\mathcal{D}'_{+n}$  be such distributions with support bounded on the left,  $\mathcal{D}'_{Nn}$  is the same as  $\mathcal{D}'_{+n}$  except the support is bounded at  $t_N$ . All the desired results will then follow from the fact that  $\mathcal{D}_{+n}$  is dense in both  $\mathcal{D}'_n$  and  $\mathcal{D}'_{+n}$ , that is, any distribution in  $\mathcal{D}'_n$  or  $\mathcal{D}'_{+n}$  is a limit of a sequence of infinitely differentiable functions in  $\mathcal{D}_{+n}$ .<sup>32</sup>

For example the idealized network of Fig. 10a) results by taking the limit of a sequence of networks of the type of Fig. 10b) where, as a distributional limit

$$\lim_{j \rightarrow \infty} u_j = u, u_j \in \mathcal{D}_{+1}, u = \text{unit step}$$

A typical  $u_j$  is shown in Fig. 10c)

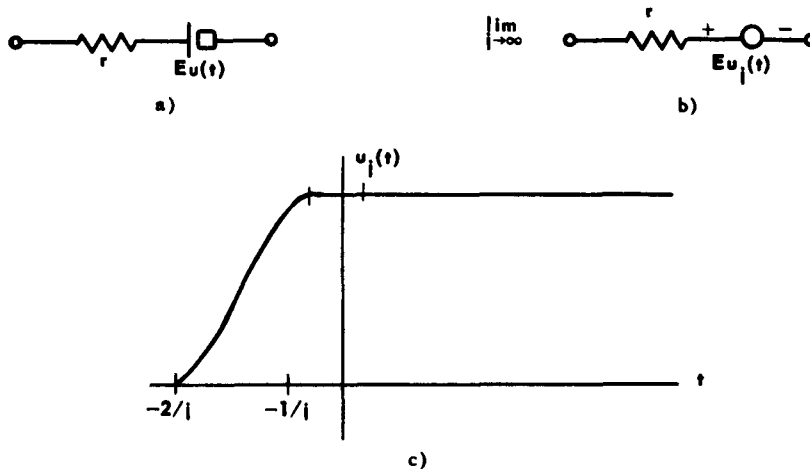


FIG. 10. LIMITING NETWORKS

If in Fig. 10c) we replace the points  $-1/j$  and  $-2/j$  by  $-j$  and  $-2j$ , then when the limit is taken,  $u(t)$  is replaced by the constant 1 for all time. This then allows consideration of perfect batteries. Since initial currents in inductors and voltages can be considered through the use of unit step functions, the above limiting process allows the standard procedure for incorporating initial conditions. The smooth functions of Fig. 10c) physically mean that such smooth variables, are the ones actually appearing at terminals when a finite network is constructed.

In general it is hard to state exactly when extensions to distributional variables can be made. For instance the nonlinear resistor  $r = 1$  can not be extended to impulsive currents  $i = \delta$ , since  $\delta^2$  is undefined.<sup>33</sup> However, in the linear, time-invariant and solvable case, to which most the remainder of this work is restricted, we can always extend  $N_a$ , and hence  $N$ , to distributional  $\underline{e}$  and  $\underline{i}$  in the following way.

By the solvability of  $N$ , if a sequence  $\{\underline{e}_j\}$  has  $\underline{e}_j \rightarrow 0$  then  $\underline{v}_j \rightarrow -\underline{i}_j$  and these tend to a unique value. This value can only be zero, since by linearity  $[0, 0] \in N$ . Consequently, if  $\underline{e}_j \rightarrow 0$  then  $\underline{i}_j \rightarrow 0$  and  $N_a$  is said to define a continuous mapping, defined as

$$\underline{i} = \mathcal{Y}_a[\underline{e}]$$

Now, exciting with  $\{\underline{e}(t+\tau) - \underline{e}(t)\}/\tau$ , the current becomes by linearity

$$\mathcal{Y}_a\left[\frac{\underline{e}(t+\tau) - \underline{e}(t)}{\tau}\right] = \{\mathcal{Y}_a[\underline{e}(t+\tau)] - \mathcal{Y}_a[\underline{e}(t)]\}/\tau$$

But by time-invariance, for  $\tau > 0$ , we can write this as  $\{\underline{i}(t+\tau) - \underline{i}(t)\}/\tau$ . Taking the limit as  $\tau \rightarrow 0$  we see that

$$d\underline{i}/dt = \mathcal{Y}_a[d\underline{e}/dt]$$

In other words the continuous mapping  $\mathcal{Y}_a$  commutes with the operation of differentiation. Considering any  $\underline{e} \in \mathcal{D}'_{+n} \cap \mathcal{D}'_{Nn}$ , by the denseness of  $\mathcal{D}_{+n} \cap \mathcal{D}_{Nn}$  in  $\mathcal{D}'_{+n} \cap \mathcal{D}'_{Nn}$  we can find a sequence of  $\underline{e}_j \in \mathcal{D}_{+n} \cap \mathcal{D}_{Nn}$  such that  $\underline{e}_j \rightarrow \underline{e}$ . Applying these  $\underline{e}_j$  to  $N_a$  yields  $\underline{i}_j \in \mathcal{D}_{+n} \cap \mathcal{D}_{Nn}$ , and, by the continuity of the mapping,  $\underline{i}_j \rightarrow \underline{i}$  with  $\underline{i} \in \mathcal{D}'_{Nn}$ . By first restricting  $\underline{e}$  to  $\underline{e} \in \mathcal{D}'_{Nn} \cap \mathcal{E}'_n$ , where  $\mathcal{E}'_n$  is the set of  $n$ -vector distributions of compact support, we see with Schwartz, since  $\mathcal{Y}_a$  is continuous



and commutes with differentiation, that  $y_a$  can be represented by an nxn matrix, convolution operator,  $y_a$ .<sup>34</sup>

That is

$$\underline{i} = y_a * \underline{e} \quad (8a)$$

$$\underline{v} = [\delta l_n - y_a] * \underline{e} \quad (8b)$$

where  $\delta$  is the unit impulse and  $l_n$  is the nxn identity matrix. By choosing the entries of  $\underline{e}$  to approach impulses, we see that the entries of  $y_a$  are in  $\mathcal{D}'_{Nn}$  and, therefore, have support bounded on the left, if  $t_N > -\infty$ . We then extend (8a) from  $\underline{e} \in \mathcal{D}'_{Nn} \cap \mathcal{C}'_n$  to any  $\underline{e}$  for which the convolution is defined. If the columns of  $y_a$  are in  $\mathcal{D}'_{+n}$ , which is always the case if  $t_N > -\infty$  or, as we will soon see, if  $N$  is passive, then (8a) can be used for any  $\underline{e} \in \mathcal{D}'_{+n}$ , in which case  $\underline{i} \in \mathcal{D}'_{+n}$  results. Of course this extension coincides with the one obtained by letting  $\tau < 0$  in Eq. (3) when  $\underline{e} \in \mathcal{D}'_{+n}$ .<sup>35</sup>

To illustrate this procedure we consider a familiar example.

#### Example 2:

Consider a linear, time-invariant inductor. The augmented network is described by

$$e = l \frac{di}{dt}$$

We can extend  $N_a$  from  $\mathcal{D}_{+1}$  to unit step functions by either solving this for  $e$  of the form of Fig. 10c) and taking a limit or by inserting unit step functions directly in the differential equation.

But

$$\delta(t) = \lim_{j \rightarrow \infty} \{ju(t) - ju(t-1/j)\}$$

and thus we apply

$$e = e_j = ju(t) - ju(t-1/j)$$

to the differential equation. This gives

$$i_j(t) = j\{u(t) - u(t-1/j) - e^{-t/l}u(t) + e^{(-t+1/j)/l}u(t-1/j)\}$$

By a power series expansion

$$e^{(-t+1/j)/l} = e^{-t/l} + (1/jl)e^{-t/l} + \text{order } (1/j^2)$$

Consequently, since  $e^{-t/\ell}\delta(t) = \delta(t)$ ,

$$\lim_{j \rightarrow \infty} i_j = (1/\ell)e^{-t/\ell}u(t) = y_a(t)$$

Using this with (8a) gives 1 for any  $e \in \mathcal{D}'_{+1}$ . Note that the above differential equation for  $i$  allows the solution

$i = -(1/\ell)e^{-t/\ell}u(-t)$  when  $e = \delta$ . This solution is ruled out, however, by our extension procedure.

If  $t_N = -\infty$ , then apparently  $e \in \mathcal{D}'_{+n}$  need not imply that  $i \in \mathcal{D}'_{+n}$ . For instance the "network" for which  $i_j$  takes the form of Fig. 11, when  $e_j \in \mathcal{D}_{+1}$  and  $e_j \rightarrow \delta$ , has  $e = \delta$  accompanied by  $i = u(-t) = y_a$ .

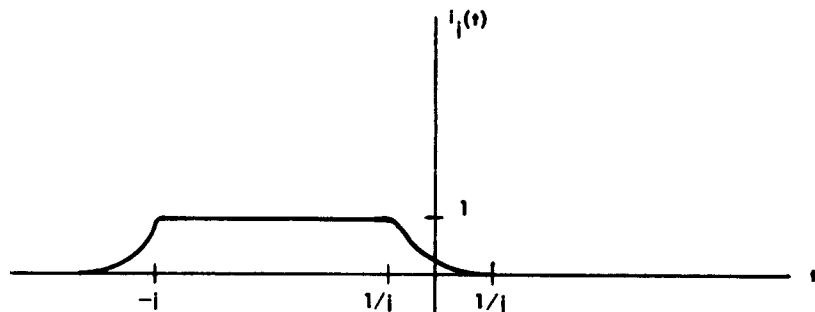


FIG. 11. FUNCTIONS CONVERGING TO  $u(-t)$ .

Such a network, if it is actually a network, presents somewhat of a paradox, since inserting suitable  $e_j \rightarrow \delta$  into (8a) shows that the extended network has  $i_j(-\infty) \neq 0$ . That is, the original network and the extended network wouldn't coincide in this case; it appears that solvability essentially doesn't hold here.

Let  $\mathcal{D}'_{L_{2n}}$  be the set of real,  $n$ -vector distributions which are finite sums of derivatives of  $L_{2n}$  vectors. If  $N$  is linear, time-invariant, solvable and passive, then, as we now show,  $e \in \mathcal{D}'_{L_{2n}}$  implies  $i, v \in \mathcal{D}'_{L_{2n}}$ . This is seen by noting that if  $e \in \mathcal{D}'_{L_{2n}}$  then  $\alpha * e \in \mathcal{D}'_{L_{2n}}$  for  $\alpha$  any scalar in the set  $\mathcal{D}$  of infinitely differentiable functions of compact support.<sup>36</sup> Now  $\alpha * e = \alpha * v + \alpha * i$  and  $\alpha * e$  can be approximated

arbitrarily well by  $\underline{e}_j \in \mathcal{D}_{+n}$  and hence so will be  $\alpha * \underline{v}$  and  $\alpha * \underline{i}$  by solvability and the continuity of a linear, time-invariant mapping.

But

$$\int_{-\infty}^t (\alpha * \underline{\tilde{e}})(\alpha * \underline{e}) d\tau = \int_{-\infty}^t (\alpha * \underline{\tilde{v}})(\alpha * \underline{v}) d\tau + \int_{-\infty}^t (\alpha * \underline{\tilde{i}})(\alpha * \underline{i}) d\tau + 2 \int_{-\infty}^t (\alpha * \underline{\tilde{v}})(\alpha * \underline{i}) d\tau \quad (9)$$

By assumption the term on the left is finite and non-negative. The same holds for the last term on the right, by passivity and the fact that the terms under the integral are approached arbitrarily closely by  $\mathcal{D}_{+n}$  vectors. Consequently the other terms, which must be non-negative, are finite and  $\underline{e} \in \mathcal{D}'_{L_{2n}}$  does imply  $\underline{i}, \underline{v} \in \mathcal{D}'_{L_{2n}}$ . This result will show that the Laplace transform of  $y_a$  is analytic in the right-half plane. We now turn to such considerations.

Consider a linear, time-invariant, solvable  $N$  with its domain of definition extended as far into  $\mathcal{D}'_n$  as possible by (8). Let the voltage of  $N_a$  be

$$\underline{e}_k = \text{Re} \underline{E} e^{pt} u(t+k)$$

for  $k$  real,  $p = \sigma + j\omega$  a fixed complex number,  $j = \sqrt{-1}$ , and  $\underline{E}$  an arbitrary complex constant  $n$ -vector; of course  $\text{Re}$  denotes the "real part of".

The resulting current is given by the convolution of (8a) as

$$\underline{i}_k(t) = \text{Re} \left\{ \left[ \int_{-\infty}^{\infty} y_a(\tau) e^{-p\tau} u(t-\tau+k) d\tau \right] \underline{E} e^{pt} \right\}$$

By linearity the real part can be taken at any stage. For convenience we then drop the  $\text{Re}$  and assume it to be inserted at the end of any calculation. Taking the limit as  $k \rightarrow \infty$  we get

$$\underline{i}(t) = \left\{ \int_{-\infty}^{\infty} y_a(\tau) e^{-p\tau} d\tau \right\} \underline{e}(t) = Y_a(p) \underline{e}(t) \quad (10a)$$

$$\underline{e}(t) = \underline{E} e^{pt} \quad (10b)$$

This process can only be carried out if the term in brackets,  $Y_a(p)$ , which is the bilateral Laplace transform,  $\mathcal{L}_b[y_a]$ , exists for some  $p$ . In general there will be some  $\sigma_l \leq \sigma_r$  such that  $Y_a(p)$  exists for

$\sigma_l \leq \sigma \leq \sigma_r$ . Equation (8b) gives a similar result for  $\underline{y}$ ; such a representation holds for  $\underline{y}$  if and only if it holds for  $\underline{i}$  by (8b), where  $\mathcal{L}_b[\delta \underline{1}_n] = \underline{1}_n$ . If a linear, time-invariant  $N$  can be extended by this, or any other, method such that  $\underline{y} = \underline{V}e^{pt}$  and  $\underline{i} = \underline{I}e^{pt}$  are paired, then we will call  $N$ ,  $\mathcal{L}_b$ -representable. The above shows that most such solvable  $N$  are  $\mathcal{L}_b$ -representable, however, some nonsolvable  $N$ , such as the nullator, are  $\mathcal{L}_b$ -representable.<sup>37</sup>

An important class of  $\mathcal{L}_b$  representable  $N$  are the linear, time-invariant, solvable, passive  $N$ . For such  $N$ ,  $\sigma_l \leq 0$ ,  $\sigma_r = \infty$ , and consequently, in this case  $Y_a(p)$  is analytic in  $\sigma > 0$ . This follows from the fact, as we saw above, that  $\underline{e} \in \mathcal{D}'_{L_{2n}}$  yields  $\underline{i} \in \mathcal{D}'_{L_{2n}}$ . Choosing the entries of  $\underline{e}$  all zero except for one impulsive entry, we can isolate any column of  $\underline{y}_a$  by  $\underline{i} = \underline{y}_a * \underline{e}$ . The entries for  $\underline{y}_a$  are all zero for  $t < 0$  since otherwise, convoluting with  $\alpha \in \mathcal{D}$ ,  $\alpha = 0$  for  $t < 0$ , we would have  $\alpha * \underline{i} = \underline{y}_a * (\alpha * \underline{e})$  nonzero for  $t < 0$  which would contradict (9), all for the above impulsive type of  $\underline{e}$ .<sup>38</sup> Thus, for the type of  $N$  under consideration, we know that the columns of  $\underline{y}_a$  are in  $\mathcal{D}'_{L_{2n}}$  and zero for  $t < 0$ . By the very definition of  $\mathcal{D}'_{L_{2n}}$  we can write, where  $k$  is finite,

$$\underline{y}_a = \sum_{j=1}^k \underline{a}^j (f_{aj}) / dt^j$$

with the columns of the  $n \times n$  matrices  $f_{aj}$  in  $L_{2n}$  and zero for  $t < 0$ . Taking the bilateral Laplace transform gives

$$\mathcal{L}_b[\underline{y}_a] = Y_a(p) = \sum_{j=1}^k p^j \mathcal{L}_b[f_{aj}]$$

By a well-known theorem of Laplace transform theory, each  $\mathcal{L}_b[f_{aj}]$  is analytic in  $\sigma > 0$ , and almost everywhere on  $\sigma = 0$ , and by this last formula for  $Y_a(p)$ , the same result holds for  $Y_a(p)$ .<sup>39</sup> That is  $Y_a(p)$ , exists and is analytic in  $\sigma > 0$  and almost everywhere on  $\sigma = 0$ . For networks with rational  $Y_a(p)$  this gives a stability result, since it says that no poles of  $Y_a$  can lie in the right half-plane.

The network for which  $e = \delta$  yields  $i = \exp[t^2]u(t)$  is not

$\mathcal{L}_b$ -representable. From the above comments on the existence of  $Y_a(p)$ , this network can't be passive, but a direct determination of this through (4) seems hopeless.

By exciting  $N_a$  with exponential  $\underline{e}(t)$  we obtain, by (10) and (8), exponential responses  $\underline{i}$  and  $\underline{v}$  for  $\mathcal{L}_b$ -representable  $N$ . That is

$$\underline{e}(t) = \underline{E}e^{pt} \text{ yields} \quad (11a)$$

$$\underline{i}(t) = \underline{I}e^{pt} \quad (11b)$$

$$\underline{v}(t) = \underline{V}e^{pt} \quad (11c)$$

For such  $N$  we therefore extend the domain of definition further by allowing  $[\underline{V}e^{pt}, \underline{I}e^{pt}] \in N$ . We can then work entirely with Laplace transform quantities by defining the frequency domain network,  $N(p)$ , as

$$N(p) = \{[\underline{V}(p), \underline{I}(p)] \mid [\underline{V}e^{pt}, \underline{I}e^{pt}] \in N\} \quad (12)$$

For the frequency domain network, time no longer appears and we work with functions of the complex variable  $p$ . As is well-known, for constraints which are represented by ordinary differential equations with constant coefficients,  $N(p)$  is simpler than  $N$  to work with, since the constraints become algebraic. The main advantage of such a description probably shows up when synthesis is considered.

Example 3:

If we consider the network of Fig. 12, we see that  $N_a$  is described by<sup>40</sup>

$$e + \frac{de}{dt} = 2i + 3\frac{di}{dt} + 2\frac{d^2i}{dt^2}$$

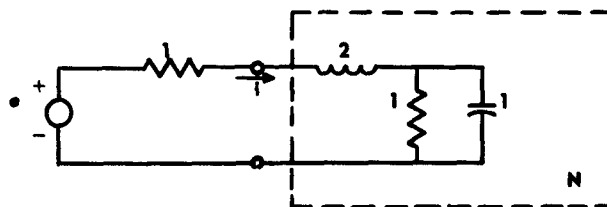


FIG. 12. NETWORK FOR EXAMPLE 3.

Letting  $e(t) = Ee^{pt}$ ,  $i(t) = Ie^{pt}$  gives

$$(1+p)E = (2+3p+2p^2)I$$

Since

$$Y_a(p) = (p+1)/(2p^2+3p+2)$$

we see from the Laplace transform interpretation, that  $\sigma > -3/4$  since the singularity furthest to the right is on the  $\sigma = -3/4$  line. Since  $e = v+i$ ,  $N(p)$  is described by

$$[(2p^2+2p+1)/(p+1)]I, I] \in N(p)$$

for any complex  $I$  and  $\sigma > \sigma_\ell = -3/4$

Note that if a physical  $N$  is given, defined by (2), then  $N(p)$  is unique, when it exists. Further, if  $N(p)$  is given such that  $Y_a(p)$  exists, then by finding the inverse Laplace transform,  $\mathcal{L}_b^{-1}[Y_a(p)]$ , and using (8a), a physical network,  $N$ , is well-determined.

Limiting ourselves to the linear, time-invariant case, if  $\sigma_\ell < \sigma_r$ ,  $N(p)$  is seen to form a vector space over the field of functions of a complex variable defined in  $\sigma_\ell < \sigma < \sigma_r$ , if we define

$$a[\underline{V}, \underline{I}] \triangleq [a\underline{V}, a\underline{I}]$$

and

$$[\underline{V}_1, \underline{I}_1] + [\underline{V}_2, \underline{I}_2] \triangleq [\underline{V}_1 + \underline{V}_2, \underline{I}_1 + \underline{I}_2].^{41}$$

As a result of the constraint defining  $N$ , we see that the vectors

$[\underline{V}, \underline{I}]$  in  $N(p)$  form an  $r$ -dimensional sub-space of all possible vectors  $[\underline{V}, \underline{I}]$ . If we arrange  $\underline{V}$  and  $\underline{I}$  in a  $2n \times 1$  column matrix,  $\begin{bmatrix} \underline{V} \\ \underline{I} \end{bmatrix}$ , then we

can find some matrix  $M(p)$  of complex functions defined in  $\sigma_\ell < \sigma < \sigma_r$  and of rank  $2n-r$  and order  $m \times 2n$ , where  $m \geq 2n-r$ , such that

$M(p) \begin{bmatrix} \underline{V} \\ \underline{I} \end{bmatrix} = 0$  constrains  $\underline{V}$  and  $\underline{I}$  to  $N(p)$ . If  $2n-r \geq n$ , we choose

$m = 2n-r$  while if  $2n-r < n$ , we choose  $m = n$  such that  $M$  is  $n \times 2n$ .

Partitioning  $M$  into  $M = [A, -B]$  then yields the fundamental equations

$$A(p)\underline{V}(p) = B(p)\underline{I}(p) \quad (13)$$

These equations constrain  $\underline{V}$  and  $\underline{I}$  to  $N(p)$  and thus describe  $N$ . Of course the  $A$  and  $B$  are not unique, since  $M(p)$  can be premultiplied by any nonsingular  $m \times m$  matrix, with a description of the form of (13) still resulting. As is seen by the nullator and norator, these equations can be used to describe other than solvable networks. Further, for a given network (13) can be obtained in many ways. For instance, as seen through (10a),  $A(p)$  and  $B(p)$  are essentially Laplace transformed quantities and hence (13) can sometimes be obtained by taking Laplace transforms of describing equations.

A more satisfying proof of (13) can be given if  $N$  is linear, time-invariant, and solvable, as then

$$\underline{i} = y_a * e \quad (8a)$$

$$\underline{v} = [\delta 1_n - y_a] * e \quad (8b)$$

Convoluting (8a) by  $[\delta 1_n - y_a]$  on the left gives

$$[\delta 1_n - y_a] * \underline{i} = [\delta 1_n - y_a] * y_a * e = [y_a - y_a * y_a] * e = y_a * [\delta 1_n - y_a] * e = y_a * \underline{v}$$

or

$$\boxed{y_a * \underline{v} = [\delta 1_n - y_a] * \underline{i}} \quad (14a)$$

Taking bilateral Laplace transforms

$$Y_a(p) \underline{V} = [1_n - Y_a(p)] \underline{I} \quad (14b)$$

This is again (13) with  $A$  and  $B$  explicitly evaluated; in fact  $A$  and  $B$  are here  $n \times n$ .

Example 4:

a) Consider the network of Fig. 13

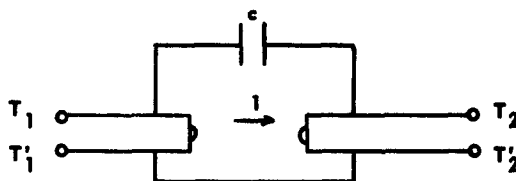


FIG. 13. NETWORK FOR EXAMPLE 4a).

The current flowing to the right through the capacitor is

$$i_c = cd(v_1 - v_2)/dt$$

The current  $i_1$  is

$$i_1 = -v_2 + cd(v_1 - v_2)/dt$$

while the current  $i_2$  is

$$i_2 = v_1 - cd(v_1 - v_2)/dt$$

Letting  $v$  and  $i$  be of exponential form gives

$$\begin{bmatrix} pc & -pc-1 \\ -pc+1 & pc \end{bmatrix} \begin{bmatrix} v_1 \\ v_2 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} i_1 \\ i_2 \end{bmatrix}$$

This is (13) with  $A(p)$  taken as the admittance matrix. Note however that

$$\begin{bmatrix} pc & -pc-1 \\ 1 & 1 \end{bmatrix} \begin{bmatrix} v_1 \\ v_2 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix} \begin{bmatrix} i_1 \\ i_2 \end{bmatrix}$$

also describes the network since we have merely premultiplied by

$$\begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix}$$

b) The nullator is described by

$$\begin{bmatrix} 0 \\ 1 \end{bmatrix} [V] = \begin{bmatrix} 1 \\ 0 \end{bmatrix} [I]$$

for which A and B are not square.

c) The norator is described by

$$[0][V] = [0][I]$$

d) The transformer is described by

$$\begin{bmatrix} -T & 1 \\ 0 & 0 \end{bmatrix} \begin{bmatrix} v_1 \\ v_2 \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 1 & T \end{bmatrix} \begin{bmatrix} i_1 \\ i_2 \end{bmatrix}$$

Note that, as with the nullator and norator no inverses exist for A and B.

e) The voltage inversion negative impedance converter is defined by



$$\begin{bmatrix} 1 & 1 \\ 0 & 0 \end{bmatrix} \begin{bmatrix} V_1 \\ V_2 \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 1 & 1 \end{bmatrix} \begin{bmatrix} I_1 \\ I_2 \end{bmatrix}$$

By choosing A and B in different ways one can define new and perhaps interesting linear, time-invariant networks. Pre-multiplying (13) by a non-singular matrix C(p) we get

$$CA\underline{V} = CB\underline{I} \quad (15)$$

Properly choosing C gives the familiar network descriptions. For instance the impedance, admittance, and (normalized) scattering matrices can be, respectively, defined by

$$Z = A^{-1}B; C = A^{-1} \quad (16a)$$

$$Y = B^{-1}A; C = B^{-1} \quad (16b)$$

$$S = (B+A)^{-1}(B-A); CA = 1_n - S, CB = 1_n + S \quad (16c)$$

At this point we omit any physical interpretation of these and merely point out that, since

$$\underline{V} - \underline{I} = (1_n - 2Y_a)\underline{E} = S(\underline{V} + \underline{I}) = S\underline{E}$$

by (16c) we have

$$S(p) = 1_n - 2Y_a(p) \quad (17)$$

As was shown before (11), every linear, time-invariant, solvable and passive N possess a  $Y_a(p)$  which is in fact analytic in  $\sigma > 0$  and exists for almost all  $p = j\omega$ . Consequently, by (17), we conclude the fundamental result that every linear, time-invariant, solvable, passive N has a scattering matrix which is analytic in  $\sigma > 0$  and exists for almost all  $p = j\omega$ .<sup>42</sup>

Equation (13) is generally only defined for a certain region in the p plane, that for which the appropriate Laplace transform converges. Whenever possible, we extend this region by analytically continuing  $N(p)$  to the left and right. Since  $N(p)$  may then become multiple-valued, whenever we meet a branch point  $\alpha + j\beta$  we make a linear branch cut to  $-\infty + j\beta$ , if on the left, or  $+\infty + j\beta$  if on the right, and thus make  $N(p)$  single-valued. For instance a branch point is met at  $p = 0$  when

considering the infinitely long R-L cable, with  $Z(p) = +\sqrt{p}$  originally defined only in the right-half plane. This analytically continued  $N(p)$  is identified with the original, since they both coincide in the original domain of definition.

Natural frequencies are conveniently defined in terms of the analytically continued  $N(p)$ .  $p_0$  is called a short-circuit natural frequency if  $[0, \underline{I}(p_0)] \in N(p_0)$ ,  $\underline{I}(p_0) \neq 0$ . Physically this means that some nonzero exponential current can be forced into the (extended) network when zero voltage appears across the terminals. For instance a short-circuit has every  $p_0$  as a short-circuit natural frequency. From  $A\underline{V} = B\underline{I}$  we see that  $B(p_0)$  must be singular at a short-circuit natural frequency and hence, if  $Z$  exists, (15a) shows that  $p_0$  is a zero of the determinant of  $Z$ . The definition then corresponds to the calculations normally made and generalizes that of "frequencies present due to only initial conditions."<sup>43</sup> The definition also holds for non-meromorphic  $Z$  matrices, for instance, for the infinitely long R-L cable mentioned above,  $p = 0$  is a short-circuit natural frequency. Dually  $p_0$  is an open-circuit natural frequency if  $[\underline{V}, 0] \in N(p_0)$  for  $\underline{V}(p_0) \neq 0$ .

In synthesis it is easiest to work with passivity conditions in terms of  $N(p)$  in place of the  $N$  of definition 3. Since, in the linear, time-invariant, solvable case, after extending from  $\mathcal{D}_{Nn}$  to  $\mathcal{D}_{+n}$ , we can approximate any  $[\text{Re } \underline{V}e^{pt}, \text{Re } \underline{I}e^{pt}] \in N$  arbitrarily closely by a sequence of allowed pairs  $[\underline{v}_j(t), \underline{i}_j(t)]$  for the original  $N$ , passivity necessarily requires<sup>44</sup>

$$\mathcal{E}_p(t) = \int_{-\infty}^t (\text{Re } \underline{\tilde{V}}e^{p\tau})(\text{Re } \underline{\tilde{I}}e^{p\tau})d\tau \geq 0 \quad (18)$$

for all  $t$  and every  $[\underline{V}, \underline{I}] \in N(p)$  for every  $p$  in  $\text{Re } p > 0$ .

In many situations it is desirable to investigate the internal structure of a network. For this we define the notion of a circuit.

Definition 9:

A circuit  $C$  is an interconnection of networks  $N_i$ ,  $i = 1, \dots, k$ .

By an interconnection is meant that the  $n_1$ -vector of  $N_1$ , the

$n_2$ -vectors of  $N_2$ , etc., are interrelated by Kirchhoff's laws. Here  $k$  is an integer or infinity. We can connect external leads to a circuit such that looking in from the outside  $C$  looks like an  $n$ -port. Of course  $C$  must be constructed at a creation time greater or equal to the creation time of any of the interconnected networks. It should be pointed out that a circuit can be closed upon itself, that is have no terminals, as is seen by the circuit of Fig. 14.

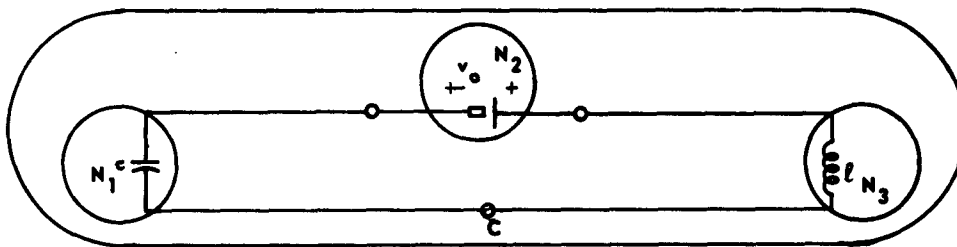


FIG. 14. A CLOSED CIRCUIT.

The concept of a circuit allows us to conveniently look at finite networks.

Definition 10:

$N$  is finite if it can be constructed as a circuit consisting of a finite number of the networks of Example 1 (resistors, inductors, capacitors, transformers, gyrators).

In essence, a finite network is defined by an equivalence class of circuits.<sup>45</sup> Thus, if circuits,  $C_1$  and  $C_2$  have external leads connected such that they define networks  $N_{C_1}$  and  $N_{C_2}$ , then we will call  $C_1$  and  $C_2$  equivalent (at the terminals), written  $C_1 \approx C_2$ , if  $N_{C_1} = N_{C_2}$ . For example, the circuits of Fig. 15a), assumed to have  $t_N = -\infty$ , are equivalent. However, the circuits of Fig. 15b), which are assumed created at  $t_N = 0$  with different initial voltages, are not equivalent. This latter result only seems reasonable, since their responses to different excitations will be different.

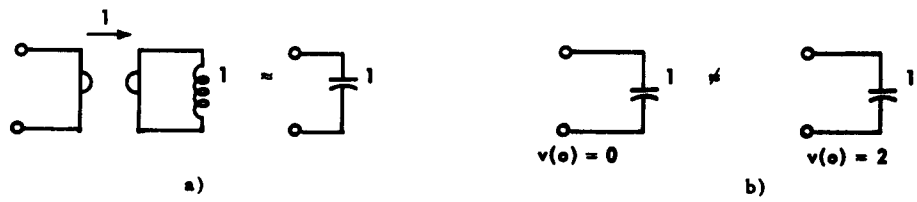


FIG. 15. ILLUSTRATION OF EQUIVALENT CIRCUITS.

## V. CONCLUSIONS

Using what appear to be the most basic ideas, an n-port has been defined as well as the various types of properties that can be possessed. In contrast to other such theories in the literature, such an n-port can be nonlinear, time-varying or active. In the linear, time-invariant, solvable cases the types of variables allowed can be extended from infinitely differentiable vectors of support bounded on the left to distributional n-vectors. The variables in many such cases can also be extended to be of exponential form, this always being true in the passive case.

The definition of a network is different than commonly found. That is, we don't define a network in terms of operators but as a collection of pairs of variables. Our justification for this is that in the operator description,  $L[\underline{f}] = \underline{g}$ , the variables  $\underline{f}$  are best thought of as inputs while the  $\underline{g}$  are to be considered as outputs. However, for a network it seems that sometimes a variable will be used as an input while at others times the same variable should be considered as an output. For instance if a voltage source is applied to a resistor, one naturally considers the voltage as the input and the current as the output. But one can equally well apply a current source to the same resistor in which case the current would be considered as the input. It seems that the operator description is most appropriate in studying control systems since, in  $L[\underline{f}] = \underline{g}$ , one here would wish to control an output  $\underline{g}$  by the use of the input  $\underline{f}$ . Of course we did use the operator idea in the extension to distributional variables. This was done, since we worked with the augmented network where we always considered  $\underline{e}$  as the excitation and either  $\underline{i}$  or  $\underline{v}$  as the response.

The definitions of network properties must be given in terms of the original variables, in place of the distributional or exponential variables, since otherwise meaningless results occur. For instance, the energy integral Eq. (4) can't be evaluated for an impulse of voltage on a capacitor. Further, an inductor would not look reciprocal, since

$$i_1 = u(t), v_1 = l\delta(t)$$

and

$$i_2 = I = \text{constant}, v_2 = 0$$

are allowed with distributional and exponential extensions, but

$$l\delta * I = lI\delta = 0 * u$$

if

$$I \neq 0, l \neq 0$$

In several works in the literature it is postulated that a network is something possessing the various properties of linearity, time-invariance, passivity and sometimes solvability. However, it seems to us that this is somewhat a misuse of the concept of a postulate. It seems that what should be postulated is the existence of physical devices subject to a mathematical description of the form of Eq. (2), in the theory presented here. The various properties of such a description can then be checked to see if the given network possesses such a property, as passivity, say.

From working with the various definitions of part b), it seems that most of these definitions are as desired. However, it may be that some future considerations would require some sort of modifications. For instance, the definition of solvable is important in the theory of linear networks. Perhaps, though, there is some better concept which contains that of solvability, which is needed for the study of nonlinear networks. Similarly, reciprocity is defined for general networks, but perhaps with more study it would become necessary to restrict it to purely linear networks. Like-wise the definition of lossless, which hasn't been worked with much, may not be the most appropriate one.

The "network" associated with Fig. 11 raises interesting questions. For instance by observing this, one wonders if perhaps every linear, time-invariant, solvable N can't be made passive by augmenting (as in Fig. 9) with sufficient resistance.<sup>46</sup> If so, then it would appear that even for active networks, the Laplace transform representation should converge in a right half-plane.

### NOTES

1. See McMillan, [Ref. 1], and Raisbeck, [Ref. 2]. McMillan's approach is closer to the work presented here than any other. Raisbeck, although not quite so rigorous, is the starting point of most recent studies. McMillan essentially assumes linearity, time-invariance and reciprocity while Raisbeck assumes the existence of an impedance matrix; both assume passivity.
2. See Youla, [Ref. 3], Zemanian, [Ref. 4], as well as König, [Ref. 5]. These papers are all based upon the concept of a linear transformation. [Ref. 3] works in Hilbert space and gives an excellent but abstract theory for the scattering matrix. [Ref. 4] works with distributions with some interesting time domain results. [Ref. 5] gives a rather complicated theory but has some interesting impedance representations.
3. See Newcomb, [Ref. 6]. This shows that by a suitable choice of the operator domain of [Ref. 3], networks which one would normally consider as passive, causal and single-valued, need not have these properties.
4. See the second section of [Ref. 35].
5. Typical conjugate variables would be force and velocity, voltage and current, temperature and entropy change. One wonders if such a choice can be made for biological systems.
6. Intuitively, by the support of a function of time,  $h(t)$ , is meant the set of  $t$  for which  $h(t)$  is non-zero. More precisely, the support is the closure of the set of points in  $t$  for which  $h(t) \neq 0$ , [Ref. 7, p. 17]. The support of a vector being bounded means that the support of each entry of the vector is bounded.
7. We use the standard set theory symbols. That is,  $\epsilon$  denotes "contained in",  $\cap$  represents "intersection", and  $A = \{x | P(x)\}$  means that  $A$  is the set of all  $x$  such that the proposition  $P(x)$  is satisfied.

We comment that  $\underline{f} \in \mathcal{D}_{+k} \cap \mathcal{D}_{Nn}$  can not be replaced by  $\underline{f} \in \mathcal{D}_{Nn}$  if  $t_N = -\infty$ , since then  $\underline{f}$  would not need to have support bounded on

the left.

8. If a measured entity were not infinitely differentiable, infinite values would be obtained by the use of differentiators. This argument is not too solid, however, since ideal differentiators don't exist. One feels that impulses aren't allowed since many non-linear devices can't tolerate them.
9. If  $\underline{g}$  is given as the voltage vector we merely relabel.
10. We assume for simplicity and with Shelley, [Ref. 8, p. 813], that the universe has existed from eternity.
11. In german an n-port is called a 2n-pole with this nomenclature being taken over into English by McMillan, [Ref. 1, p. 225]. McMillan's definition is the only precise one we know of in English, but it holds only for finite networks. Certainly the original use of the word port is imprecise, [Ref. 9]. See also the IRE standard, [Ref. 10], [Ref. 11].
12. An interesting analog of the gyrator results from plasma physics. For a charged particle of mass  $m$  and charge  $q$  moving in a magnetic field  $\vec{B}$  with velocity  $\vec{v}$ , we have  $\frac{m d\vec{v}}{dt} = q\vec{v} \times \vec{B}$ . If  $\vec{B}$  is directed only in the  $z$  direction with magnitude  $B_z$ , this gives


$$\begin{bmatrix} \dot{v}_x \\ \dot{v}_y \end{bmatrix} = \begin{bmatrix} 0 & qB_z/m \\ -qB_z/m & 0 \end{bmatrix} \begin{bmatrix} v_x \\ v_y \end{bmatrix}$$

where the cyclotron frequency  $\omega_c = qB_z/m$  is analogous to  $\gamma$  and represents the rate at which the particle gyrates around the  $B$  field.

13. For microwave realizations of the gyrator see Lax, [Ref. 12, p. 544]. For low frequency realizations see Bogert, [Ref. 13], where active circuits are used.
14. See Carlin, [Ref. 14], where these degenerate networks form a basis for a synthesis technique.
15. See Cauer, [Ref. 15, p. 161]. Cauer calls the  $k$ -terminal network a "complete  $2k$ -pole".
16. Note that the variables for the lower right terminal pair of Fig. 5a) are uniquely determined from the other variables by



the use of Kirchhoff's laws. If sources are only applied at the ports of Fig. 5b) the transformers can be omitted and the network redrawn as

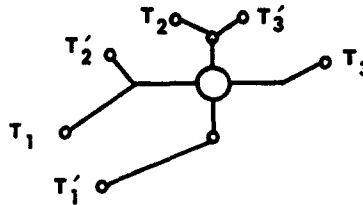

17. The standard definition is in terms of operators, see Papoulis, [Ref. 16, p. 82], or Youla, [Ref. 3, p. 106]. An alternate, but somewhat complicated, definition in terms of the state has been given by Zadeh, [Ref. 17]. This was slightly improved at a later date, [Ref. 18], to include L-C networks. Essentially Zadeh's definitions attempt to distinguish between linear equations and linear systems. Thus in his terminology one system could have different initial conditions, while in the theory we present, the same "elements" with different initial conditions define different systems. This latter viewpoint seems to be the only consistent one when just terminal behavior is considered. It does, however, have drawbacks when considering internal construction.

18. If  $[v_j, i_j] \in N$  then for real  $a_j$  and finite  $m$ ,

$$\left[ \sum_{j=1}^m a_j v_j, \sum_{j=1}^m a_j i_j \right] \in N. \text{ However, for a linear } N, \text{ this result}$$

apparently need not hold for infinite  $m$ . We could postulate that it does hold for  $m = \infty$ , but none of the theory seems to be changed by such an assumption.

19. The fact that homogeneity and additivity could be separately violated was essentially proven by Gerald Alonzo in the Stanford graduate course EE 235.

20. Of course anyone would be silly to build Fig. 7b) using diodes. Practically the diodes wouldn't be ideal anyway and the resistor equivalence would only hold as an approximation. The example does illustrate the fact stated, which would be taken as a weakness of the definitions. Another example is given in [Ref. 17].
21. For the concept of a vector space see Birkhoff, [Ref. 19, p. 162].
22. The standard definition for time-invariance can be found in Papoulis, [Ref. 16, p. 83]. This essentially reads: A system is time-invariant if  $g(t)$  is the response to  $f(t)$  then  $g(t-t_1)$  is the response to  $f(t-t_1)$ . Although the physical meaning of such a definition is clear the mathematics is rather imprecise since, by simply changing the variable, almost any system is (mathematically) time-invariant).
23. Besides the definition given, others can be found. Shekel, [Ref. 20, p. 269], defines a network as being passive if the average power input in the sinusoidal steady state is positive. This, however, allows a resistive network containing a negative capacitor as passive. Raisbeck, [Ref. 2, p. 1511], requires only

$$\mathcal{E}(\infty) = \int_{-\infty}^{\infty} \tilde{\underline{v}}(\tau) \underline{i}(\tau) d\tau \geq 0$$

This, however, seems to restrict  $\underline{v}$  and  $\underline{i}$  and since  $\mathcal{E}(t)$  could be negative for some  $t < \infty$  but still  $\mathcal{E}(\infty) \geq 0$ , this doesn't seem reasonable. Youla, [Ref. 3, p. 110], allows complex excitations and responses and then defines

$$\mathcal{E}(t) = \text{Re} \int_{-\infty}^t \tilde{\underline{v}}^*(\tau) \underline{i}(\tau) d\tau$$

with a superscript asterisk the complex conjugate. We believe that a more meaningful definition for complex valued variables would be

$$\mathcal{E}(t) = \int_{-\infty}^t (\text{Re } \tilde{\underline{v}}(\tau) (\text{Re } \underline{i}(\tau))) d\tau$$

Both of the latter  $\mathcal{E}(t)$  agree with  $\mathcal{E}(t)$  of (4) when the variables are real.

24. Youla, [Ref. 21], has shown that any realization of the nullator using a finite number of the elements of example 1 must contain at least one negative resistor and one gyrator. For this reason one hesitates to call the nullator passive. In fact in early lectures on this material the author inserted an extra clause in the passivity definition to rule out nullators at any port. Such a theory seems too ad hoc and we rely upon only the solvability concept to rule the nullator out, when so desired.
25. See [Ref. 3, pp. 103 & 113]. Youla refers to the concept appearing in two earlier works which we haven't seen as yet, those of Wu and Toll. Essentially, solvability is assumed as a postulate for a network in Youla's theory.
26. It seems to us that any truly physical device is solvable. This is true for multiple-valued or hysteresis type characteristic curves such as obtained for tunnel diodes or iron-core inductors. If, for such devices, one knows the entire past history the device will be in a unique "state" at any given instant.
27. These are easily established.

Linearity: For  $N_a$  we have  $[ae, ai] = [av+ai] \in N_a$  since  $[av, ai] \in N$  for every  $a$ . Likewise  $[e_1+e_2, i_1+i_2] = [v_1+v_2+i_1+i_2, i_1+i_2] \in N_a$  since  $[v_1+v_2, i_1+i_2] \in N$  by linearity of  $N$ .

Time-invariance: Consider  $[e, i] = [v+i, i] \in N_a$ , then  $[v, i] \in N$ . By the time-invariance of  $N$ , for  $\tau \geq 0$ ,  $[v(t), i(t)] = [v_0(t+\tau), i_0(t+\tau)]$  for  $[v_0, i_0] \in N$ . Therefore  $[e(t), i(t)] = [v_0(t+\tau) + i_0(t+\tau), i_0(t+\tau)] = [e_0(t+\tau), i_0(t+\tau)]$  where  $[e_0, i_0] = [v_0+i_0, i_0] \in N_a$  since  $[v_0, i_0] \in N$ .

Passivity: We have for  $N_a$

$$e_a(t) = \int_{-\infty}^t (\tilde{v} + \tilde{i}) i d\tau = \int_{-\infty}^t \tilde{v} i d\tau + \int_{-\infty}^t \tilde{i} i d\tau$$

The last term is always non-negative while the next to the last term is, if  $N$  is passive.

28. See Ramo and Whinnery, [Ref. 22, p. 454], where Maxwell's equations are shown to yield Lorentz reciprocity. The result of [Ref. 22] is in terms of phasor quantities and thus we have replaced multi-

plication by convolution to convert to the time domain. The first real use of this result in a rigorous theory seems to be in McMillan, [Ref. 1, p. 236].


29. Matrix convolution is defined by replacing multiplication by convolution in the definition. Thus  $A*B$  is defined by

$$\sum_K a_{ik} * b_{kj}. \text{ For finite, linear, passive networks this agrees with}$$

the usual statement that for a reciprocal network the ratio of response to excitation is invariant to an interchange of the points of excitation and observation, [Ref. 23, p. 148].

The definition we give is valid for nonlinear, time-variable or active networks but it is not clear if it is meaningful then. The definition does make the following network nonreciprocal, since

$$\tilde{v}_1 * i_2 - \tilde{v}_2 * i_1 = E * (i_1 + i_2 - i_1 - i_2)$$

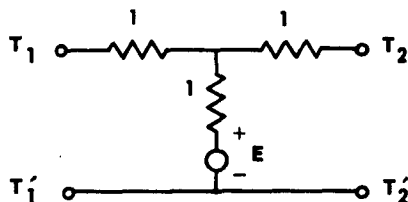


Note that if the current "excitations" for measurements one and two are the same, this network would look reciprocal (for these excitations). In fact any reciprocal, solvable 1-port is linear since, with  $\underline{i} = \underline{e} - \underline{v}$ ,  $\tilde{v}_1 * \underline{i}_2 = \underline{v}_1 * (\underline{e}_2 - \underline{v}_2) = \tilde{v}_2 * (\underline{e}_1 - \underline{v}_1)$  requires with  $\underline{e}_2 = a \underline{e}_1$ ,  $[\tilde{v}_2 - a \tilde{v}_1] * \underline{e}_1 = 0$  or for the 1-port  $\underline{v}_2 = a \underline{v}_1$  and  $\underline{i}_2 = a \underline{i}_1$  are in  $N$ . Similarly with  $\underline{e}_3 = \underline{e}_1 + \underline{e}_2$ ,  $\tilde{v}_1 * \underline{i}_3 = \tilde{v}_1 * (\underline{e}_3 - \underline{v}_3) = \tilde{v}_3 * (\underline{e}_1 - \underline{v}_1)$  or  $\tilde{v}_1 * \underline{e}_3 = \underline{v}_3 * \underline{e}_1$  and similarly  $\tilde{v}_2 * \underline{e}_3 = \tilde{v}_3 * \underline{e}_2$  adding gives  $(\tilde{v}_1 + \tilde{v}_2 - \tilde{v}_3) * (\underline{e}_1 + \underline{e}_2) = 0$  or for the 1-port  $[\underline{v}_1 + \underline{v}_2, \underline{i}_1 + \underline{i}_2] \in N$  and hence  $N$  is linear. It is not clear if such is the case for  $n$ -ports.

Sometimes a reciprocal network is called "bilateral," [Ref. 24, p. 875]. Although we have never seen a precise technical definition of the word bilateral, we would prefer to apply it exclusively to 1-ports meaning that current passes in the same manner into or out of a device. The ideal diode would not be bilateral and the concept couldn't be meaningfully applied to the gyrator.

30. Here  $\underline{0}$  is the  $n$ -vector of zeros.

A typical definition of causal is given in Youla, [Ref. 3, p. 111]. The definition so given allows the open circuit as causal but not the dual network, a short-circuit. For this reason our definition has two clauses. In [Ref. 3, p. 111] it is "proven" that "except in pathological cases, linearity and passivity imply causality". However, as shown in [Ref. 6] we believe this only to be the case when a proper interpretation of the concepts is used. Thus we essentially assume some sort of "causality" by restricting  $N$  to  $\underline{v}$  and  $\underline{i}$  in  $\mathcal{D}_{+n}$ . An excellent discussion of causality versus antecedance is contained in Bunge, [Ref. 25].

A definition differing from that of Youla, but somewhat more common, is that given by Papoulis, [Ref. 16, p. 85]. This requires the output to be zero until  $t_0$  if the input is zero until  $t_0$ . Youla's requires that if  $\underline{v}_1 = \underline{v}_2$  for  $t < t_0$  then  $\underline{i}_1 = \underline{i}_2$  for  $t < t_0$ . In definition 6 the existence of  $[\underline{0}, \underline{i}]$  and  $[\underline{v}, \underline{0}]$  is needed to be able to consider a) and b). Without such a clause one couldn't consider the non-antecedal 2-port.



31. Here  $L_{2n}$  is the set of real-valued square integrable  $n$ -vectors. That is  $\underline{f} \in L_{2n}$  if

$$\int_{-\infty}^{\infty} \underline{f}(\tau) \underline{f}(\tau) d\tau < \infty$$

It seems that an alternate definition in terms of conservative systems, as studied in mechanics, [Ref. 26, pp. 3 & 347], could be given. However, it also seems that such existing theories

don't have the complete generality contained in the concept of a network. Definition 8 is essentially that given by Youla, [Ref. 3, p. 119].

32. Except for the subscript  $n$ , the notation is the standard one found in Schwartz, [Ref. 7, p. 25]. The fact that  $\mathcal{D}_{+n}$  is dense in  $\mathcal{D}'_{+n}$  follows in a manner similar to Schwartz, [Ref. 7, p. 75]. A simpler proof follows from Schwartz, [Ref. 27, p. 22]. Thus let a sequence of infinitely differentiable functions,  $\phi_j$ , of  $\mathcal{D}_1$  converge to  $\delta$ ,  $\phi_j \rightarrow \delta$ , where  $\delta$  is the unit impulse. Then, for any distribution  $f \in \mathcal{D}'_{+1}$  we can form  $\phi_j * f$  and  $\phi_j * f \rightarrow \delta * f = f$ . Since  $\phi_j * f$  is in  $\mathcal{D}_{+1}$ , this gives the desired result, after extending to  $n$ -vectors in an obvious manner (component by component).
33. The impossibility of defining  $\delta^2$  as a distribution is shown in Schwartz, [Ref. 7, p. 117]. König has shown how the concept of a distribution can be extended, such that  $\delta^2$  is defined, [Ref. 28, p. 448]. However,  $\delta \cdot u \neq u \cdot \delta$  under this definition.
34. See Schwartz, [Ref. 27, p. 18 theorem X and p. 20], which states: Every linear continuous operation from either  $\mathcal{E}'$  or  $\mathcal{D}$  into  $\mathcal{D}'$ , commuting with differentiation, is the convolution  $\mathcal{L}(T) = S * T$  with a fixed distribution  $S \in \mathcal{D}'$  and reciprocally. This gives a rigorous justification of the physical result that the response of a linear, time-invariant system is found by convoluting the impulse response with the actual input.  
Schwartz's result is not for the matrix case, but by considering separate components of  $\underline{e}$  and  $\underline{i}$ , it is seen to yield the matrix  $y_a$ .
35. At this point, at least when  $n = 1$ , it is possible to set up a Mikusiński's algebra, [Ref. 29], since the algebra  $\mathcal{D}'_{+1}$  has no divisors of zero, [Ref. 27, p. 29]. This allows us to work with more general networks than those later called  $\mathcal{L}_p$ -representable. Of course (8) yields the same  $[\underline{v}, \underline{i}]$  pairs which originally defined the network, by the definition of  $y_a$ .
36. See Schwartz, [Ref. 27, p. 57, theorem XXV], where it is shown that: In order for a distribution  $T$  to belong to  $\mathcal{D}'_{Lp}$  it is

necessary and sufficient that, for any  $\alpha \in \mathcal{D}$ ,  $\alpha^* T \in L_p$ , recall that  $f \in L_p$  if  $\int_{-\infty}^{\infty} |f(t)|^p dt < \infty$

37. We could have simply obtained  $Y_a(p)$  by taking the Laplace transform of (8a). We feel that the physical insight of  $Y_a(p)$  being the response coefficient in (10a) for exponential excitations lends motivation to the heavy use of the Laplace transform in engineering work. The approach used follows that of Mason and Zimmerman. [Ref. 30, p. 340].

38. Choosing  $t < 0$  in Eq. (1-9) would give

$$0 = \int_{-\infty}^t (\alpha^* \tilde{v})(\alpha^* \underline{v}) d\tau + \int_{-\infty}^t (\alpha^* \tilde{i})(\alpha^* \underline{i}) d\tau + 2 \int_{-\infty}^t (\alpha^* \tilde{v})(\alpha^* \underline{i}) d\tau$$

But each term on the right must be non-negative, by passivity or the sum of squares, and hence zero.

39. See Widder, [Ref. 31, p. 80, theorem 10]. The theorem reads: If  $f(t)$  belongs to  $L_2$  in  $(0, \infty)$  then

$$\lim_{R \rightarrow \infty} \int_0^R f(t) e^{-\sigma t} dt$$

exists for  $\sigma \geq 0$  and defines a function  $F(p)$  which is analytic for  $\sigma > 0$ . Moreover

$$F(p) = \int_0^{\infty} f(t) e^{-pt} dt (\sigma > 0)$$

the integral converging absolutely for  $\sigma > 0$  and

$$\lim_{\sigma \rightarrow 0^+} F(\sigma + j\omega) = F(j\omega)$$

40. This is obtained as follows. Letting  $v_c$  be the voltage across the capacitor, plus at the top, Kirchhoff's voltage law gives  $e = i + 2(di/dt) + v_c$ . Letting  $i_c$  and  $i_r$  be the current down through the right hand capacitor and resistor gives, by Kirchhoff's current law,

$$i = i_r + i_c, \quad dv_c/dt = i_c, \quad v_c = i_r$$

Therefore  $i = v_c + dv_c/dt$ . Solving the equation in  $e$  for  $v_c$ , adding this to itself differentiated and equating to  $i$  gives the desired result.

41. For the concept of a vector space see Halmos, [Ref. 32, p. 3], or Birkhoff and MacLane, [Ref. 19, p. 162].
42. It is also true that for  $\sigma > 0$ ,  $S^*(p) = S(p^*)$ . This results from exciting  $N_a$  with  $\underline{e}_1 = \underline{E}e^{pt}$  and  $\underline{e}_2 = \underline{E}e^{p^*t}$  with  $\underline{E}$  real. Then  $\underline{i}_1(t) = Y_a(p)\underline{E}e^{pt}$  and  $\underline{i}_2(t) = Y_a(p^*)\underline{E}e^{p^*t}$  are the corresponding currents. Conjugating  $\underline{i}_2(t)$  we get

$$\underline{i}_2^*(t) = Y_a^*(p^*)\underline{E}e^{pt}$$

but this must be  $\underline{i}_1(t)$  as it is the response to  $\underline{e}_1$ . Thus, since  $\underline{E}$  was arbitrary

$$Y_a(p) = Y_a^*(p^*)$$

which gives the above stated result for  $S(p)$ .  $Z$  and  $Y$  are also analytic in  $\sigma > 0$  whenever they exist, since for instance

$$Z = (1_n + S)(1_n - S)^{-1}$$

and  $Z$  becomes non-analytic in  $\sigma > 0$  only where  $(1_n - S)$  is singular, but  $(1_n - S)$  is non-singular everywhere in  $\sigma > 0$  if  $Z$  exists (for a passive network), [Ref. 3, p. 119].

43. We comment that in the extension to exponential excitations, terms of the forms  $e^{p_1 t} + e^{p_2 t}$ ,  $p_1 \neq p_2$ , haven't been allowed. This means that the separate natural frequencies can be individually considered. For instance in working with (17) we don't have to kill off natural frequency terms by a suitable choice of initial conditions, as is sometimes done, [Ref. 33, p. 418].

44. To see this form

$$\begin{aligned} \mathcal{E}_p(t) - \mathcal{E}_j(t) &= \int_{-\infty}^t [\text{Re}(\tilde{Y}e^{p\tau})\text{Re}(\underline{I}e^{p^*\tau}) - \tilde{Y}_j(\tau)] d\tau \\ &= \int_{t_j}^t [\text{Re}(\tilde{Y}e^{p\tau})\text{Re}(\underline{I}e^{p^*\tau}) - \tilde{Y}_j(\tau)\underline{i}_j(\tau)] d\tau + \int_{-\infty}^{t_j} \text{Re}(\tilde{Y}e^{p\tau})\text{Re}(\underline{I}e^{p^*\tau}) d\tau \end{aligned}$$

where  $t_j$  is the left bound on the support of  $\underline{v}_j$  and  $\underline{i}_j$ . By choosing  $t_j \rightarrow -\infty$  with  $\sigma > 0$ , by time-invariance, the second integral tends to zero, while the first integral does also, since  $\underline{v}_j$ ,  $\underline{i}_j$  approximate the exponentials. Thus



$$\lim_{j \rightarrow \infty} \mathcal{E}_p(t) - \mathcal{E}_j(t) = 0$$

for every finite  $t$  and hence  $\mathcal{E}_p(t) \geq 0$  as  $\mathcal{E}_j(t) \geq 0$ . Note that the second integral on the right won't tend to zero if  $\sigma < 0$ .

Letting  $V_1 = |V_1|e^{j\omega V_1}$ ,  $I_1 = |I_1|e^{j\omega I_1}$ ,

(18) becomes

$$\begin{aligned} \mathcal{E}_p(t) &= \int_{-\infty}^t \sum_{i=1}^n \frac{|V_i| |I_i|}{2} e^{2\sigma\tau} [\cos(2\omega\tau + \angle V_i + \angle I_i) + \cos(\angle V_i - \angle I_i)] d\tau \\ &= \operatorname{Re} \int_{-\infty}^t \left[ \frac{\tilde{V}^* I}{2} e^{2\sigma\tau} + \frac{\tilde{V} I}{2} e^{2p\tau} \right] d\tau \\ &= \frac{1}{4} \operatorname{Re} \left[ \frac{\tilde{V}^* I}{\sigma} + \frac{\tilde{V} I}{p} e^{j2\omega t} \right] e^{2\sigma t} \end{aligned}$$

Letting  $t \rightarrow \infty$  through instants when the second term assumes its "minimum" requires, as  $\sigma > 0$

$$\operatorname{Re} (\tilde{V}^* I) - \frac{\sigma}{|p|} |\tilde{V} I| \geq 0 \text{ if } \omega \neq 0$$

or

$$(\operatorname{Re} \tilde{V})(\operatorname{Re} I) \geq 0 \text{ if } \omega = 0$$

By choosing real  $\underline{V}$  and  $\underline{I}$  and combining terms, this latter requires

$\operatorname{Re} \tilde{V}^* I \geq 0$  for  $\omega = 0$  and thus a passive network necessarily has

$Q(p) \geq 0$  for  $\sigma > 0$  where

$$Q(p) = \begin{cases} \operatorname{Re} (\tilde{V}^* I) - \frac{\sigma}{p} |\tilde{V} I| & \text{if } \omega \neq 0 \\ \operatorname{Re} \tilde{V}^* I & \text{if } \omega = 0 \end{cases}$$

Clearly this requires  $\operatorname{Re} \tilde{V}^* I \geq 0$  in  $\sigma > 0$  or if  $Y$  exists

$\operatorname{Re} [\tilde{V}^* Y V] \geq 0$  in  $\sigma > 0$  (for any complex  $\underline{V}$ ), which is the essential positive real condition. Writing

$$\begin{aligned} \operatorname{Re} \tilde{V}^* I &= \frac{1}{2} [\tilde{V}^* I + \tilde{I}^* V] = \frac{1}{4} [\tilde{V}^* I + \tilde{I}^* I + \tilde{V}^* V + \tilde{I}^* V] \\ &\quad + \frac{1}{4} [\tilde{V}^* I - \tilde{I}^* I - \tilde{V}^* V + \tilde{I}^* V] \\ &= \frac{1}{4} [\tilde{V} + \tilde{I}]^* [V + I] - \frac{1}{4} [\tilde{V} - \tilde{I}]^* [V - I] \\ &= \frac{1}{4} [\tilde{V} + \tilde{I}]^* [1_n - \tilde{S}^* S] [V + I] \geq 0 \end{aligned}$$

by the reasoning above (17). Thus we know that every linear, time-invariant, solvable N has a scattering matrix  $S(p)$  and

1)  $S(p)$  is analytic in  $\sigma > 0$

2)  $S^*(p) = S(p^*)$  in  $\sigma > 0$

3)  $I_n - \tilde{S}^*(p)S(p)$  in  $\sigma > 0$

If  $S$  is rational and satisfies these conditions it can be synthesized by known methods, [Ref. 34].

45. The relation  $C_1 \approx C_2$  is a true equivalence relation, see [Ref. 19, p. 155]. That is

$$C_1 \approx C_1$$

$$C_1 \approx C_2 \text{ implies } C_2 \approx C_1$$

$$C_1 \approx C_2, C_2 \approx C_3 \text{ implies } C_1 \approx C_3$$

46. (Added in proof) This is not the case as the following counter-examples, which we previously exhibited, show, [Ref. 36, p. 36]. For this let  $z(p) = p^2$  or  $Z(p) = \begin{bmatrix} 0 & 0 \\ -p & 0 \end{bmatrix}$ .

#### REFERENCES

1. B. McMillan, "Introduction to Formal Realizability Theory-I", Bell System Technical Journal, vol. 31, no. 2, March, 1952, pp. 217-279.
2. G. Raisbeck, "A Definition of Passive Linear Networks in Terms of Time and Energy", Journal of Applied Physics, vol. 25, no. 12, December, 1954, pp. 1510-1514.
3. D. C. Youla, L. J. Castriota, and H. J. Carlin, "Bounded Real Scattering Matrices and the Foundations of Linear Passive Network Theory", IRE Transactions on Circuit Theory, vol. CT-4, no. 1, March, 1959, pp. 102-124.
4. A. H. Zemanian, "An N-Port Realizability Theory Based on the Theory of Distributions", New York University, College of Engineering, Technical Report 400-55, March, 1962.
5. H. König and J. Meixner, "Lineare Systeme und lineare Transformationen", Mathematische Nachrichten vol. 19, 1958, pp. 265-322.
6. R. W. Newcomb, "On Causality, Passivity and Single-Valuedness" IRE Transactions on Circuit Theory, vol. CT-9, no. 1, March, 1962, pp. 87-88.
7. L. Schwartz, Théorie des distributions, vol. I, Hermann, Paris, 1957.
8. T. Hutchinson, The Complete Poetical Works of Percy Bysshe Shelley, Oxford University Press, London, 1956.
9. H. A. Wheeler, "Ten Years of a "Multi-Port" Terminology for Networks", Proceedings of the IRE, vol. 47, no. 10, p. 1786.
10. IRE Standards on Electron Tubes, Proceedings of the IRE, vol. 45, no. 7, July, 1957, p. 1002.
11. IRE Standards on Antennas and Waveguides, Proceedings of the IRE, vol. 47, no. 4, April, 1959, p. 581.
12. B. Lax and K. J. Button, Microwave Ferrites and Ferrimagnetics, McGraw-Hill, New York, 1962.
13. B. P. Bogert, "Some Gyrator and Impedance Inverter Circuits", Proceedings of the IRE, vol. 43, no. 7, July, 1955, pp. 793-796.

14. H. J. Carlin and D. C. Youla, "Network Synthesis with Negative Resistors", Proceedings of the IRE, vol. 49, no. 5. pp. 907-920.
15. W. Cauer, "Ideale Transformatoren und lineare Transformationen" Elektrische Nachrichten - Technik, vol. 9, no. 5, May, 1932, pp. 157-174.
16. A. Papoulis, The Fourier Integral and its Applications, McGraw-Hill, New York, 1962.
17. L. A. Zadeh, "An Extended Definition of Linearity", Proceedings of the IRE, vol. 49, no. 9, September, 1961, pp. 1452-1453.
18. L. A. Zadeh, "On the Extended Definition of Linearity", Proceedings of the IRE, vol. 50, no. 2, February, 1962, pp. 200-201.
19. G. Birkhoff and S. MacLane, A Survey of Modern Algebra, MacMillan, New York, Revised Edition, 1956.
20. J. Shekel, "Energy Relations in Multiterminal Transducers" IRE Transactions on Circuit Theory, vol. CT-2, no. 3, September, 1955, pp. 268-271.
21. D. C. Youla, "Internal Structure of 1-Ports Simultaneously Open and Short-Circuited", Polytechnic Institute of Brooklyn, Microwave Research Institute, Memorandum no. 47, February 7, 1961.
22. S. Ramo and J. R. Whinnery, Fields and Waves in Modern Radio, John Wiley & Sons, New York, 1953.
23. E. A. Guillemin, Introductory Circuit Theory, John Wiley & Sons, New York, 1953.
24. E. A. Guillemin, "Teaching of Circuit Theory and Its Impact on Other Disciplines", Proceedings of the IRE, vol. 50, no. 5, May, 1962, pp. 872-878.
25. M. Bunge, "Causality, Chance, and Law", American Scientist, vol. 49, no. 4, December, 1961, pp. 432-448.
26. H. Goldstein, Classical Mechanics, Addison-Wesley, Cambridge, Massachusetts, 1950.
27. L. Schwartz, Théorie des distributions, vol. II, Hermann, Paris, 1959.
28. H. König, "Multiplikation von Distributionen", I) Mathematische Annalen, vol. 128, 1955, pp. 420-452.

29. J. Mikusiński, Operational Calculus, Pergamon Press, New York, 1959.
30. S. J. Mason and H. J. Zimmerman, Electronic Circuits, Signals and Systems, John Wiley & Sons, New York, 1960.
31. D. V. Widder, The Laplace Transform, Princeton, 1946.
32. P. R. Halmos, Finite-Dimensional Vector Spaces, D. Van Nostrand, Princeton, 1958.
33. C. A. Desoer and E. S. Kuh, "Bounds on Natural Frequencies of Linear Active Networks", Proceedings of the Brooklyn Polytechnic, Symposium on Active Networks and Feedback Systems, vol. X, 1961, pp. 415-436.
34. Y. Oono and K. Yasuura, "Synthesis of Finite Passive 2n-Terminal Networks with Prescribed Scattering Matrices", Memoirs of the Faculty of Engineering, Kyushu University, vol. 14, no. 2, May, 1954, pp. 125-177.
35. R. W. Newcomb and R. G. Oliveira, "Laplace Transforms - Distributional Theory", to appear as a Stanford Electronics Laboratories Technical Report, no. 2250-3.
36. R. W. Newcomb, "Synthesis of Passive Networks for Networks Active at  $p_0$ ", ERL Report, University of California, Berkeley, Series 60, Issue 316, September 14, 1960.

SYSTEMS THEORY  
DISTRIBUTION LIST  
March 1963

GOVERNMENT

USAEEDL  
Fort Monmouth, N. J.  
1 Dr. H. Jacobs, SIGRA/SL-PF

Procurement Data Division  
USAS Equipment Support Agency  
Fort Monmouth, N. J.  
1 Mr. M. Rosenfeld

Commanding General, USAERDL  
Fort Monmouth, N. J.  
5 SIGRA/SL-SC, Bldg. 42  
1 TDC, Evans Signal Lab Area

Chief, West Coast Office  
USAEEDL  
75 South Grand Ave., Bldg. 13  
1 Pasadena 2, Calif.

Commanding Officer, ERDL  
Fort Belvoir, Va.  
1 Tech. Document Center

Commanding Officer  
Frankford Arsenal  
Bridge and Tacony St.  
Philadelphia 37, Pa.  
1 Library Br., 0270, Bldg. 40

Ballistics Research Lab.  
Aberdeen Proving Ground, Md.  
2 V. W. Richard, BML

Chief of Naval Research  
Navy Dept.  
Washington 25, D. C.  
2 Code 427  
1 Code 420  
1 Code 463

Commanding Officer, USAERHU  
P. O. Box 205  
1 Mountain View, Calif.

Commanding Officer  
ONR Branch Office  
1000 Geary St.  
1 San Francisco 9, Calif.

Commanding Officer  
ONR Branch Office  
1030 E. Green St.  
1 Pasadena, Calif.

Commanding Officer  
ONR Branch Office  
86 E. Randolph St.  
Chicago 1, Ill.  
1 John Crerar Library Bldg.

Commanding Officer  
ONR Branch Office  
207 W. 24th St.  
1 New York 11, N. Y.

Office of Naval Research  
Navy 100, Box 39  
Fleet Post Office  
New York, N. Y.  
1 Dr. I. Kowe

New York Naval Shipyard  
Material Laboratory Library  
Brooklyn, N. Y.  
1 Code 911B, M. Rogofsky, Bldg. 291

Chief Bureau of Ships  
Navy Dept.  
Washington 25, D. C.  
1 Code 691A1  
1 Code 686  
1 Code 607 NTDS  
1 Code 687D  
1 Code 732, A. E. Smith  
1 Code 681A

Officer-in-Charge, ONR  
Navy 100, Box 39, Fleet P. O.  
16 New York, N. Y.

U.S. Naval Research Lab.  
Washington 25, D. C.  
6 Code 2000  
1 Code 5240  
1 Code 5430  
1 Code 5200  
1 Code 5300  
1 Code 5400  
1 Code 5266, G. Abraham  
1 Code 2027  
1 Code 5260  
1 Code 5210-GA  
1 Code 5270  
1 Code 6430

Chief, Bureau of Naval Weapons  
Navy Dept.  
Washington 25, D. C.  
1 RAAV-6  
1 RUDC-1  
2 RRBN-3  
1 RAAV-44

Chief of Naval Operations  
Navy Dept.  
Washington 25, D. C.  
1 Code Op 945Y

Director, Naval Electronics Lab.  
1 San Diego 52, Calif.

USN Post Graduate School  
1 Monterey, Calif.  
1 Tech. Reports Librarian  
1 Prof. Gray, Electronics Dept.  
1 Dr. H. Titus

Weapons Systems Test Div.  
Naval Air Test Center  
Patuxent River, Md.  
1 Library

U.S. Naval Weapons Lab.  
Dahlgren, Va.  
1 Tech. Library

Naval Ordnance Lab  
Corona, Calif.  
1 Library  
1 H.H. Wieder, 423

Commander, USN Air Dev. Center  
Johnsville, Pa.  
1 NADC Library  
1 AD-5

Commander, USN Missile Center  
Point Mugu, Calif.  
1 NO3022

Commanding Officer  
U.S. Army Research Office  
Box CM, Duke Station  
Durham, N. C.  
3 CHD-AA-IP

Department of the Army  
Office, Chief of Research & Dev.  
The Pentagon, Washington 25, D. C.  
1 Research Support Div., Rm. 3D442

Office of the Chief of Engineers  
Dept. of the Army  
Washington 25, D. C.  
1 Chief, Library Branch

Office of the Asst. Secy. of Defense  
Washington 25, D. C.  
1 (AE) Pentagon Bldg., Rm. 3D-984

Hqs., USAF (AFRDR-MU. 3)  
The Pentagon, Washington 25, D. C.  
1 Mr. H. Mulkey, Rm. 4N-335

Chief of Staff, USAF  
Washington 25, D. C.  
2 AFDR-ER

Hqs., USAF  
Dir. of Science & Technology  
Electronics Division  
Washington 25, D. C.  
1 AFST-EL/CS, Maj. E. H. Myers

Aeronautical Systems Division  
Wright-Patterson AFB, Ohio  
1 Lt. Col. L. M. Butsch, Jr.-ASHNBS  
1 ASHNSB D. R. MOORE  
1 ASHNS-2  
1 ASAPHD (Rand)  
1 ASHNSA, Adv. Tech. Br., Elec Tec Lab

Commandant  
AF Institute of Technology  
Wright-Patterson AFB, Ohio  
1 MCIL, Library

Executive Director  
AF Office of Scientific Res.  
Washington 25, D. C.  
1 SRYA

AF Special Weapons Center  
Kirtland AFB, N. M.  
2 SWOI

Dir., Air University Library  
Maxwell AFB, Ala.  
1 CR-4532

AF Missile Test Center  
Patrick AFB, Fla.  
1 AFMTC Tech. Library, MU-135

Commanding General  
Rome Air Dev. Center  
Griffiss AFB, Rome, N. Y.  
2 RCHM

Commander, AF Cambridge Res. Labs.  
ARDC, L. O. Hanscom Field  
Bedford, Mass.  
1 CRTOTT-2, Electronics

Hqs., AF Systems Command  
Andrews AFB  
Washington 25, D. C.  
1 SCTAE

Asst. Secy. of Defense (R&D)  
R&D Board, Dept. of Defense  
Washington 25, D. C.  
1 Tech. Library

# SCHOOLS

Office of Director of Defense  
Dept. of Defense  
Washington 25, D. C.  
1 Research & Engineering

Institute for Defense Analyses  
1666 Connecticut Ave.  
Washington 9, D. C.  
1 W. E. Bradley

Defense Communications Agency  
Dept. of Defense  
Washington 25, D. C.  
1 Code 121A, Tech. Library

Advisory Group on Electron Devices  
346 Broadway, 8th Floor East  
New York 13, N. Y.  
2 H. Sullivan

Advisory Group on Reliability of  
Electronic Equipment  
Office, Asst. Secy. of Defense  
1 The Pentagon, Washington 25, D. C.

Commanding Officer  
Diamond Ordnance Fuse Labs  
Washington 25, D. C.  
2 ORDTL 930, Dr. R. T. Young

Diamond Ordnance Fuse Lab.  
U.S. Ordnance Corps  
Washington 25, D. C.  
1 ORDTL-450-638, Mr. R. H. Comyn

U.S. Dept. of Commerce  
National Bureau of Standards  
Boulder Labs  
Central Radio Propagation Lab.  
1 Br , Colo.  
2 Mr. V. Lincoln , Chief RWSS

NSF, Engineering Section  
1 Washington, D. C.

Information Retrieval Section  
Federal Aviation Agency  
Washington, D. C.  
1 MS-112, Library Branch

ASTIA  
Arlington Hall Station  
Arlington 12, Va.  
10 TIPCA

U.S. Coast Guard  
1300 E Street, N.W.  
Washington 25, D. C.  
1 EEE Station 5-5

Office of Technical Services  
Dept. of Commerce  
1 Washington 25, D. C.

Director  
National Security Agency  
Fort George G. Meade, Md.  
1 R42

NASA, Goddard Space Flight Center  
Greenbelt, Md.  
1 Code 611, Dr. G. H. Ludwig  
1 Chief, Data Systems Division

Chief, U.S. Army Security Agency  
Arlington Hall Station  
2 Arlington 12, Va.

\* U of Aberdeen  
Dept. of Natural Philosophy  
Marischal College  
Aberdeen, Scotland  
1 Mr. R. V. Jones

U of Arizona  
EE Dept.  
Tucson, Ariz.  
1 R. L. Walker  
1 D. J. Hamilton

\* U of British Columbia  
Vancouver 8, Canada  
1 Dr. A. C. Soudack

California Institute of Technology  
Pasadena, Calif.  
1 Prof. R. W. Gould  
1 Prof. L. M. Field, EE Dept.  
1 D. Braverman, EE Dept.

California Institute of Technology  
4800 Oak Grove Drive  
Pasadena 3, Calif.  
1 Library, Jet Propulsion Lab.

U of California  
Berkeley 4, Calif.  
1 Prof. R. M. Saunders, EE Dept.  
1 Dr. R. K. Wakerling, Radiation Lab.  
Info. Div., Bldg. 30, Rm. 101

U of California  
Los Angeles 24, Calif.  
1 C. T. Leondes, Prof. of Engineering  
Engineering Department  
1 K. S. Elliott, Electromagnetics Div.  
College of Engineering

U of California, San Diego  
School of Science & Engineering  
La Jolla, Calif.  
1 Physics Dept.

Carnegie Institute of Technology  
Schenley Park  
Pittsburg 13, Pa.  
1 Dr. E. M. Williams, EE Dept.

Case Institute of Technology  
Engineering Design Center  
Cleveland 6, Ohio  
1 Dr. J. B. Neswick, Director

Cornell U  
Cognitive Systems Research Program  
Ithaca, N. Y.  
1 F. Rosenblatt, Hollister Hall

Drexel Institute of Technology  
Philadelphia 4, Pa.  
1 F. B. Haynes, EE Dept.

U of Florida  
Engineering Bldg., Rm. 336  
Gainesville, Fla.  
1 M. J. Wiggins, EE Dept.

Georgia Institute of Technology  
Atlanta 13, Ga.  
1 Mrs. J. H. Crowland, Librarian  
1 F. Dixon, Engr. Experiment Station

Harvard U  
Pierce Hall  
Cambridge 38, Mass.  
1 Dean H. Brooks, Div. of Engr. &  
Applied Physics, Rm. 217  
2 E. Farkas, Librarian, Rm. 303A  
Tech. Reports Collection

U of Hawaii  
Honolulu 14, Hawaii  
1 Asst. Prof. K. Najita, EE Dept.

Illinois Institute of Technology  
Technology Center  
Chicago 16, Ill.  
1 Dr. P.C. Yuen, EE Dept.

U of Illinois  
Urbana, Ill.  
1 P. D. Coleman, EE Res. Lab.  
1 W. Perkins, EE Res. Lab.  
1 A. Albert, Tech. Ed., EE Res. Lab.  
1 Library Serials Dept.  
1 Prof. D. Alpert, Coordinated Sci Lab

\* Instituto de Pesquisas da Marinha  
Ministerio da Marinha  
Rio de Janeiro  
Estado da Guanabara, Brazil  
1 Roberto B. da Costa

Johns Hopkins U  
Charles and 34th St.  
Baltimore 18, Md.  
1 Librarian, Carlyle Barton Lab.

Johns Hopkins U  
8621 Georgia Ave.  
Silver Spring, Md.  
1 N. H. Choksy  
1 Mr. A. W. Nagy, Applied Physics Lab.

Linfield Research Institute  
McMinnville, Ore.  
1 G. N. Hickok, Director

Marquette U  
College of Engineering  
1515 W. Wisconsin Ave.  
Milwaukee 3, Wis.  
1 A. C. Moeller, EE Dept.

M I T  
Cambridge 39, Mass.  
1 Res. Lab. of Elec., Doc. Rm. 26-327  
1 Miss A. Sils, Libn. Rm. 4-244, LIR  
1 Mr. J. E. Ward, Elec. Sys. Lab.

M I T  
Lincoln Laboratory  
P.O. Box 73  
1 Lexington 73, Mass.  
1 Navy Representative  
1 Dr. W. I. Wells

U of Michigan  
Ann Arbor, Mich.  
1 Dir., Cooley Elec. Labs., N. Campus  
1 Dr. J.E. Rowe, Elec. Phys. Lab.  
1 Comm. Sci. Lab., 180 Friese Bldg.

U of Michigan  
Institute of Science & Technology  
P.O. Box 618  
Ann Arbor, Mich.  
1 Tech. Documents Service  
1 W. Wolfe--IRIA--

U of Minnesota  
Institute of Technology  
Minneapolis 14, Minn.  
1 Prof. A. Van der Ziel, EE Dept.

U of Nevada  
College of Engineering  
Reno, Nev.  
1 Dr. R. A. Manhart, EE Dept.

# INDUSTRIES

- Northeastern U  
The Dodge Library  
Boston 15, Mass.  
1 Joyce E. Lunde, Librarian
- Northwestern U  
2422 Oakton St.  
Evanston, Ill.  
1 W. S. Toth, Aerial Measurements Lab.
- U of Notre Dame  
South Bend, Ind.  
1 E. Henry, EE Dept.
- Ohio State U  
2024 Niel Ave.  
Columbus 10, Ohio  
1 Prof. E. M. Boone, EE Dept.
- Oregon State U  
Corvallis, Ore.  
1 H. J. Oorthuys, EE Dept.
- Polytechnic Institute  
333 Jay St.  
Brooklyn, N. Y.  
1 L. Shaw, EE Dept.
- Polytechnic Institute of Brooklyn  
Graduate Center, Route 110  
Farmingdale, N. Y.  
1 Librarian
- Purdue U  
Lafayette, Ind.  
1 Library, EE Dept.
- Rensselaer Polytechnic Institute  
Troy, N. Y.  
1 Library, Serials Dept.
- \* U of Saskatchewan  
College of Engineering  
Saskatoon, Canada  
1 Prof. R. E. Ludwig
- Stanford Research Institute  
Menlo Park, Calif.  
1 External Reports, G-037
- Syracuse U  
Syracuse 10, N. Y.  
1 EE Dept.
- \* Uppsala U  
Institute of Physics  
Uppsala, Sweden  
1 Dr. P. A. Tove
- U of Utah  
Salt Lake City, Utah  
1 R. W. Grow, EE Dept.
- U of Virginia  
Charlottesville, Va.  
1 J.C. Wyllie, Alderman Library
- U of Washington  
Seattle 5, Wash.  
1 A. E. Harrison, EE Dept.
- Yale U  
New Haven, Conn.  
1 Sloane Physics Lab.  
1 EE Dept.  
1 Dunham Lab., Engr. Library
- Argonne National Lab.  
9700 South Cass  
Argonne, Ill.  
1 Dr. O.C. Simpson
- Admiral Corp.  
3800 Cortland St.  
Chicago 47, Ill.  
1 E. N. Roberson, Librarian
- Airborne Instruments Lab.  
Comac Road  
Deer Park, Long Island, N. Y.  
1 J. Dyer, Vice-Pres & Tech. Dir.
- Amperex Corp.  
230 Duffy Ave.  
Hicksville, Long Island, N. Y.  
1 Proj. Engineer, S. Barbasso
- Autonetics  
Div of North American Aviation, Inc.  
9150 E. Imperial Highway  
Downey, Calif.  
1 Tech. Library 3040-3
- Bell Telephone Labs.  
Murray Hill Lab.  
Murray Hill, N. J.  
1 Dr. J. R. Pierce  
1 Dr. S. Darlington  
1 Mr. A. J. Grossman  
1 Mr. J. A. Hornbeck
- Bell Telephone Labs., Inc.  
Technical Information Library  
Whippany, N. J.  
1 Tech. Repts. Librn., Whippany Lab.
- \* Central Electronics Engineering  
Research Institute  
Pilani, Rajasthan, India  
1 Om P. Gandhi - Via: CNR/London
- Columbia Radiation Lab.  
538 West 120th St.  
New York, N. Y.  
1
- Convair - San Diego  
Div. of General Dynamics Corp.  
San Diego 12, Calif.  
1 Engineering Library
- Cook Research Labs.  
6401 W. Oakton St.  
Morton Grove, Ill.  
1
- Cornell Aeronautical Labs., Inc.  
1455 Genesee St.  
Buffalo 21, N. Y.  
1 Library
- Eitel-McCullough, Inc.  
301 Industrial Way  
San Carlos, Calif.  
1 Research Librarian
- Fairchild Semiconductor Corp.  
4001 Junipero Serra Blvd.  
Palo Alto, Calif.  
1 Dr. V. H. Grinich
- General Electric Co.  
Defense Electronics Div., LMED  
Cornell University, Ithaca, N. Y.  
1 Library - Via: Commander, ASD  
W-P AFB, Ohio  
WCLGL-4, D.E. Lewis
- General Electric TWT Products Sec.  
601 California Ave.  
Palo Alto, Calif.  
1 Tech. Library, G. G. Lob
- General Electric Co., Res. Lab.  
P.O. Box 1088, Schenectady, N.Y.  
1 Dr. P. M. Lewis  
1 R.L. Shuey, Mgr. Info. Studies Sec.
- General Electric Co.  
Electronics Park, Bldg. 3, Rm. 143-1  
Syracuse, N. Y.  
1 Documents Library, Y. Burke
- Gilfillan Brothers  
1815 Venice Blvd.  
Los Angeles, Calif.  
1 Engr. Library
- The Hallicrafters Co.  
5th and Kostner Ave.  
Chicago 24, Ill.  
1
- Hewlett-Packard Co.  
1501 Page Mill Road  
Palo Alto, Calif.  
1
- Hughes Aircraft Co.  
Florence at Teale St.  
Culver City, Calif.  
1 Tech. Doc. Cen., Bldg. 6, Rm C2048
- Hughes Aircraft Co.  
P.O. Box 278  
Newport Beach, Calif.  
1 Library, Semiconductor Div.
- IBM, Poughkeepsie, N. Y.  
1 Product Dev. Lab, E.M. Davis
- IBM, Box 390, Boardman Road  
Poughkeepsie, N. Y.  
1 J. C. Logue, Data Systems Div.
- IBM ASD & Research Library  
Monterey & Cottle Roads  
San Jose, Calif.  
1 Miss M. Griffin, Bldg. 025
- ITT Federal Labs.  
500 Washington Ave.  
Nutley 10, N. J.  
1 Mr. E. Mount, Librarian
- Laboratory for Electronics, Inc.  
1075 Commonwealth Ave.  
Boston 15, Mass.  
1 Library
- LEL, Inc.  
75 Akron St.  
Copiague, Long Island, N. Y.  
1 Mr. R. S. Mautner
- Lenkurt Electric Co.  
San Carlos, Calif.  
1 M. L. Waller, Librarian
- Librascope  
Div. of General Precision, Inc.  
808 Western Ave.  
Glendale 1, Calif.  
1 Engr. Library
- Lockheed Missiles & Space Div.  
P.O. Box 504, Bldg. 524  
Sunnyvale, Calif.  
1 Dr. W.M. Harris, Dept. 67-30  
1 G.W. Price, Dept. 67-33

\* NO AF OR CLASSIFIED REPORTS

SYSTEMS THEORY 3/63



Melpar, Inc.  
3000 Arlington Blvd.  
Falls Church, Va.  
1 W.T. Layton, Physical Elec. Sec.  
1 Librarian

Microwave Associates, Inc.  
Northwest Industrial Park  
Burlington, Mass.  
1 K. Mortenson

Microwave Electronics Corp.  
4061 Transport St.  
Palo Alto, Calif.  
1 S.F. Kalsel  
1 M.C. Long

Minneapolis-Honeywell Regulator Co.  
1177 Blue Heron Blvd.  
Riviera Beach, Fla.  
1 Semiconductor Products Library

Monsanto Research Corp.  
Station 3, Box 6  
Dayton 7, Ohio  
1 Mrs. D. Crabtree

Monsanto Chemical Co.  
800 N. Linbergh Blvd.  
St. Louis 66, Mo.  
1 Mr. E. Orban, Mgr. Inorganic Dev.

\* Dir., National Physical Lab.  
Hilside Road  
New Delhi 12, India  
1 S.C. Sharma - Via: CNR/London

\* Northern Electric Co., Ltd.  
Research & Development Labs.  
P.O. Box 3511, Station "C"  
Ottawa, Ontario, Canada  
1 J.F. Tatlock  
Via: ASD, Foreign Release Office  
W-P AFB, Ohio  
Mr. J. Troyan (ASXF)

Nortronics  
Palo Verde Research Park  
6101 Crest Road  
Palo Verde Estates, Calif.  
1 Tech. Info. Center

Pacific Semiconductors, Inc.  
14520 So. Aviation Blvd.  
Lawndale, Calif.  
1 H. Q. North

Philco Corp.  
Tech. Rep. Division  
P.O. Box 4730  
Philadelphia 34, Pa.  
1 F.R. Sherman, Mgr. Editor

Philco Corp.  
Jolly and Union Meeting Roads  
Blue Bell, Pa.  
1 C.T. McCoy  
1 Dr. J.R. Feldmeier

Polarad Electronics Corp.  
43-20 Thirty-Fourth St.  
Long Island City 1, N. Y.  
1 A.H. Somenschein

Radio Corp. of America  
RCA Labs., David Sarnoff Res. Cen.  
Princeton, N. J.  
1 Dr. J. Sklansky

RCA Labs., Princeton, N. J.  
1 H. Johnson

RCA, Missile Elec. & Controls Dept.  
Woburn, Mass.  
1 Library

The Rand Corp.  
1700 Main St.  
Santa Monica, Calif.  
1 Helen J. Waldron, Librarian

Raytheon Manufacturing Co.  
Microwave & Power Tube Div.  
Burlington, Mass.  
1 Librarian, Spencer Lab.

Raytheon Manufacturing Co.  
Res. Div., 28 Seyon St.  
Waltham, Mass.  
1 Dr. H. Stats  
1 Mrs. M. Bennett, Librarian

Roger White Electron Devices, Inc.  
Tall Oaks Road  
1 Laurel Ledges, Stamford, Conn.

Sandia Corp.  
Sandia Base, Albuquerque, N. M.  
1 Mrs. B.R. Allen, Librarian

Sperry Rand Corp.  
Sperry Electron Tube Div.  
1 Gainesville, Fla.

Sperry Gyroscope Co.  
Div. of Sperry Rand Corp.  
Great Neck, N. Y.  
1 L. Swern (MS3T105)

Sperry Gyroscope Co.  
Engineering Library  
Mail Station F-7  
Great Neck, Long Island, N. Y.  
1 K. Barney, Engr. Dept. Head

Sperry Microwave Electronics  
Clearwater, Fla.  
1 J.E. Pippin, Res. Sec. Head

Sylvania Electric Products, Inc.  
208-20 Willets Point Blvd.  
Bayside, Long Island, N. Y.  
1 L.R. Bloom, Physics Lab.

Sylvania Electronics Systems  
100 First Ave.  
Waltham 24, Mass.  
1 Librarian, Waltham Labs.

Technical Research Group  
1 Syosset, Long Island, N. Y.

Texas Instruments, Inc.  
Semiconductor-Components Div.  
P.O. Box 205  
Dallas 22, Tex.  
1 Library  
1 Dr. R.L. Pritchard  
2 Dr. W. Adcock

Texas Instruments, Inc.  
1300 N. Central Expressway  
1 Dallas, Tex.

Texas Instruments, Inc.  
P.O. Box 6015  
Dallas 22, Tex.  
1 M.K. Chun, Apparatus Div.

Texas Instruments, Inc.  
Corporate Research & Engineering  
Technical Reports Service  
P.O. Box 5474  
1 Dallas 22, Tex.

Textronix, Inc.  
P.O. Box 500  
Beaverton, Ore.  
1 Dr. J.F. DeLard, Dir. of Research

Varian Associates  
611 Hansen Way  
Palo Alto, Calif.  
1 Tech. Library

Weitermann Electronics  
4549 North 38th St.  
1 Milwaukee 9, Wis.

Westinghouse Electric Corp.  
Friendship International Airport  
Box 746, Baltimore 3, Md.  
1 G.R. Kilgore, Mgr. Appl. Res. Dept.  
Baltimore Lab.

Westinghouse Electric Corp.  
3 Gateway Center  
Pittsburgh 22, Pa.  
1 Dr. G.C. Saiklai

Westinghouse Electric Corp.  
P.O. Box 284  
Elmira, N. Y.  
1 S.S. King

Zenith Radio Corp.  
6001 Dickens Ave.  
Chicago 39, Ill.  
1 J. Markin